Go To Table Of Contents

409

-001 thru -002

Pediatric Examination Table

MIDMARK®

Service and Parts Manual

Serial Number Prefixes:
CW

409 -001 thru -002

FOR USE BY MIDMARK TRAINED TECHNICIANS ONLY

Part No. 004-0001-00 Rev. G (1/01/04)

Go To Table Of Contents

TABLE OF CONTENTS

Section/Paragraph **Page**

IMPORTANT INSTRUCTIONS
General Safety Instructions ii
Safety Alert Symbols ii
Warranty Instructions ii

SECTION I GENERAL INFORMATION
1.1 Scope of Manual 1-1
1.2 How to Use Manual 1-1
1.3 Description of 409 Pediatric Examination Table 1-1
1.4 Specifications 1-1
1.5 Parts Replacement Ordering 1-3
1.6 Special Tools 1-3

SECTION II TESTING AND TROUBLESHOOTING
2.1 Operational Test 2-1
2.2 Troubleshooting Procedures 2-1

SECTION III SCHEDULED MAINTENANCE
3.1 Scheduled Maintenance 3-1

SECTION IV MAINTENANCE/SERVICE INSTRUCTIONS
4.1 Introduction 4-1
4.2 Beam Scale Components Removal / Installation 4-1
4.3 Zero Balance Adjustment 4-2
4.4 Scale Calibration 4-2
4.5 Platform Components Access 4-3
4.6 Linear Scale Alignment 4-5

SECTION V SCHEMATICS AND DIAGRAMS
None.

SECTION VI PARTS LIST
6.1 Introduction 6-1
6.2 Description of Columns 6-1
6.3 Torque Specifications And Important Assembly Notes 6-1
Pictorial Index 6-2
Left Hand Cabinet Assembly 6-3
Right Hand Cabinet Assembly 6-4
Upper Wrap Assembly (No Scale) 6-5
Upper Wrap Assembly (Mechanical Scale) 6-6
Table Top Assembly (No Scale) 6-7
Table Top Assembly (Mechanical Scale) ..... 6-8.*

COMMENTS 7-1
FAX ORDERING FORM 7-2

(*) Indicates that there has been a serial number break for the illustration and that there are additional point page(s) following the original page.

© Midmark Corporation 1995 SF-1494 Rev.5/96

Printed in U.S.A.

IMPORTANT INSTRUCTIONS

General Safety Instructions

Safety First: The primary concern of Midmark Corporation is that this table is maintained with the safety of the patient and staff in mind. To assure that services and repairs are completed safely and correctly, proceed as follows:

(1) Read this entire manual before performing any services or repairs on this table.

(2) Be sure you understand the instructions contained in this manual before attempting to service or repair this table.

Safety Alert Symbols

Throughout this manual are safety alert symbols that call attention to particular procedures. These items are used as follows:

DANGER

A DANGER is used for an imminently hazardous operating procedure, practice, or condition which, if not correctly followed, will result in loss of life or serious personal injury.

WARNING

A WARNING is used for a potentially hazardous operating procedure, practice, or condition which, if not correctly followed, could result in loss of life or serious personal injury.

CAUTION

A CAUTION is used for a potentially hazardous operating procedure, practice, or condition which, if not correctly followed, could result in minor or moderate injury. It may also be used to alert against unsafe practices.

EQUIPMENT ALERT

An EQUIPMENT ALERT is used for an imminently or potentially hazardous operating procedure, practice, or condition which, if not correctly followed, will or could result in serious, moderate, or minor damage to unit.

NOTE

A NOTE is used to amplify an operating procedure, practice or condition.

Warranty Instructions

Refer to the Midmark “Limited Warranty” printed in the Installation and Operation Manual for warranty information. Failure to follow the guidelines listed below will void the warranty and/or render the 409 Pediatric Examination Table unsafe for operation.

- In the event of a malfunction, do not attempt to operate the table until necessary repairs have been made.
- Do not attempt to disassemble table, replace malfunctioning or damaged components, or perform adjustments unless you are one of Midmark’s authorized service technicians.
- Do not substitute parts of another manufacturer when replacing inoperative or damaged components. Use only Midmark replacement parts.

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

SECTION I
GENERAL INFORMATION

1.1 Scope of Manual

This manual contains detailed troubleshooting, scheduled maintenance, maintenance, and service instructions for the 409 Pediatric Examination Table. This manual is intended to be used by Midmark's authorized service technicians.

1.2 How to Use Manual

A. Manual Use When Performing Scheduled Maintenance.

(1) Perform inspections and services listed in Scheduled Maintenance Chart (Refer to para 3.1).

(2) If a component is discovered to be faulty or out of adjustment, replace or adjust component in accordance with maintenance/service instructions (Refer to para 4.1).

B. Manual Use When Table Is Malfunctioning And Cause Is Unknown.

(1) Perform an operational test on table (Refer to para 2.1).

(2) Perform troubleshooting procedures listed in Troubleshooting Guide (Refer to para 2.2).

(3) If a component is discovered to be faulty or out of adjustment, replace or adjust component in accordance with maintenance/service instructions (Refer to para 4.1).

C. Manual Use When Damaged Component Is Known.

(1) Replace or adjust component in accordance with maintenance/service instructions (Refer to para 4.1).

1.3 Description Of 409 Pediatric Examination Table

A. General Description (See Figure 1-1).

The 409 Pediatric Examination Table is an examination table designed specifically for performing general medical examinations and procedures on small children as well as weighing the body weight and measuring the body length of a child.

The major serviceable components of the table are the beam scale components which include the "0" balance screw & weight and the scale calibration arm, platform components, linear scale, and table top locking mechanism.

1.4 Specifications

Factual data for the 409 Pediatric Examination Table is provided in Table 1-1.

Table 1-1. Specifications

Description	Data
Weight:	
Without Shipping Carton (w/scale)	201 lb (91.2 kg)
With Shipping Carton (w/scale)	246 lb (111.6 kg)
Shipping Carton	49 in. "L" x 32 in. "W" x 48 in. "H" (124.5 cm x 81.3 cm x 121.9 cm)
Dimensions:	
Table Top Length	45 in. (114.3 cm)
Overall Length	45 in. (114.3 cm)
Table Top Width	20.75 in. (52.7 cm)
Overall Width	20.75 in. (52.7 cm)
Work Height	38.25 in. (97.2 cm)
Weight Capacity (Scale Maximum)	130 lb. (59 kg)

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

SECTION I
GENERAL INFORMATION

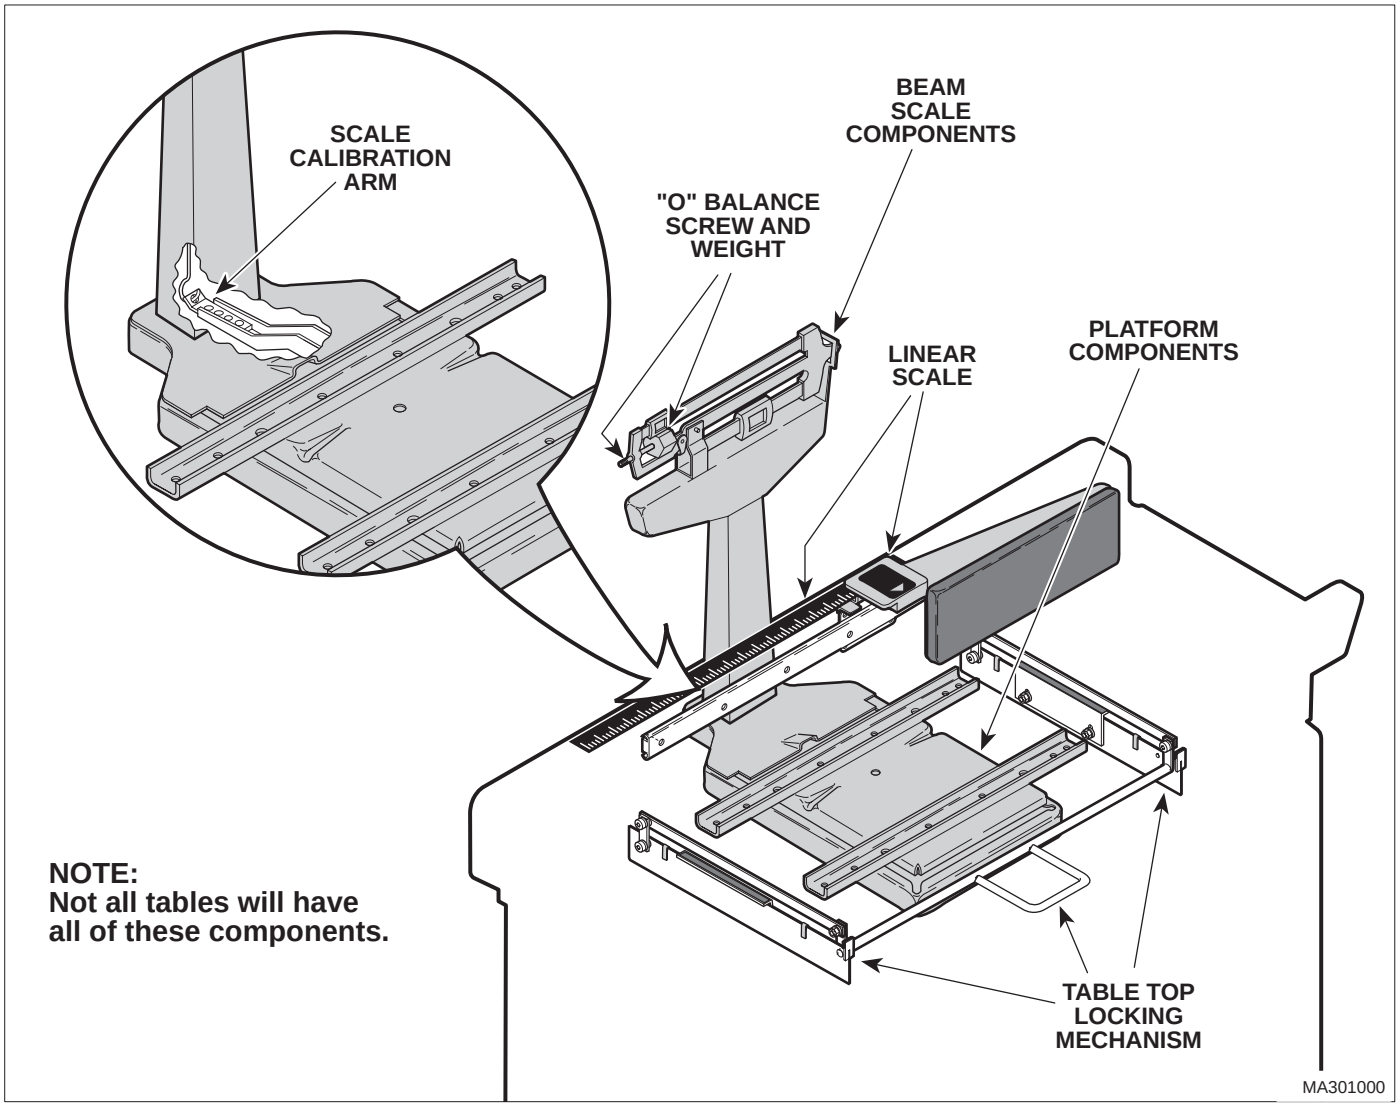

Figure 1-1. Major Components

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

1.5 Parts Replacement Ordering

If a part replacement is required, order the part directly from the factory as follows:

(1) Refer to Figure 1-2 to determine the location of the model number and serial number of the table and record this data.

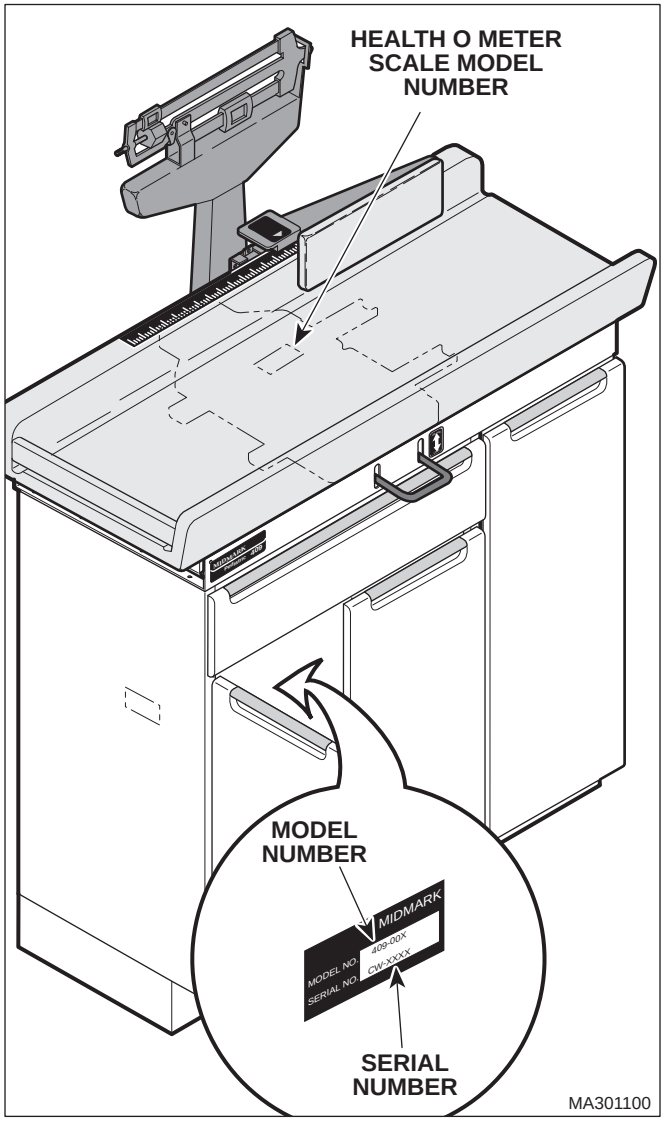

Figure 1-2. Model Number / Serial Number Location

(2) Refer to the Parts List to determine the item numbers of the parts, part numbers of the parts, descriptions of the parts, and quantities of parts needed and record this data (Refer to para 6.1).

NOTE
Ask the Purchasing Department of the company that owns the table for this information. Otherwise, this information may be obtained from the dealer that sold the table.

(3) Determine the installation date of the table and record this data.

(4) Call Midmark with the recorded information and ask for the Medical Products Technical Services Department. See back cover of this manual for the phone number or use the Fax Order Form (See page 7-2 for Fax Order Form).

1.6 Special Tools

None.

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Return To Table Of Contents

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

SECTION II
TESTING AND TROUBLESHOOTING

2.1 Operational Test (See Figure 2-1).

In order to effectively diagnose the malfunction of the table, it may be necessary to perform an operational test as follows:

DANGER
Refer to the Operator Manual for complete instructions on operating the table. Failure to do so could result in personal injury.

NOTE
The Operational Test, for the most part, only describes what should happen when the table is operated. If the table does something other than described, a problem has been discovered. Refer to the Troubleshooting Guide to determine the cause of the problem and its correction.

Also, this operational test procedure is based on units that have a scale; some units do not have a scale.

(1) Move the table top locking handle to the LOCK position. Attempt to move the table top (See Figure 2-1).

(2) Observe. The table top should be firmly locked into a stationary position.

(3) Move the table top locking handle to the UNLOCK position.

(4) Observe. The table top should not be locked into a stationary position anymore. Look between the table top and the base. There should be a approximately a 1/4 in. (6.35 mm) gap between locking rails and bottom of table top; at the very least there should not be any contact.

(5) Remove any items from table top. Set large poise weight to zero, making sure it is seated in notch and set small poise weight to zero, making sure the small poise weight is pushed firmly against shoulder of the beam.

(6) Observe. The beam pointer should balance in the center of the trig square, indicating the scale is zeroed.

(7) Place a known weight (between 20 to 40 lbs. (9.0 to 18.1 kgs) on the center of the table top (Point A). Set the large and small poise weights to the weight setting of the known weight.

(8) Observe. The beam pointer should center in the trig square, indicating the scale is calibrated and accurate.

(9) Remove the weights and move the table top locking handle to the LOCK position.

(10) Extend the linear scale fully. Using a carpenter square, check to see if the linear scale is square with the back of the table top when the scale is fully extended.

2.2 Troubleshooting Procedures

Table 2-1 is a Troubleshooting Guide which is used to determine the cause of the malfunction.

NOTE
The troubleshooting guide in Table 2-1 is based on units that have a scale; some units do not have a scale.

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

SECTION II
TESTING AND TROUBLESHOOTING

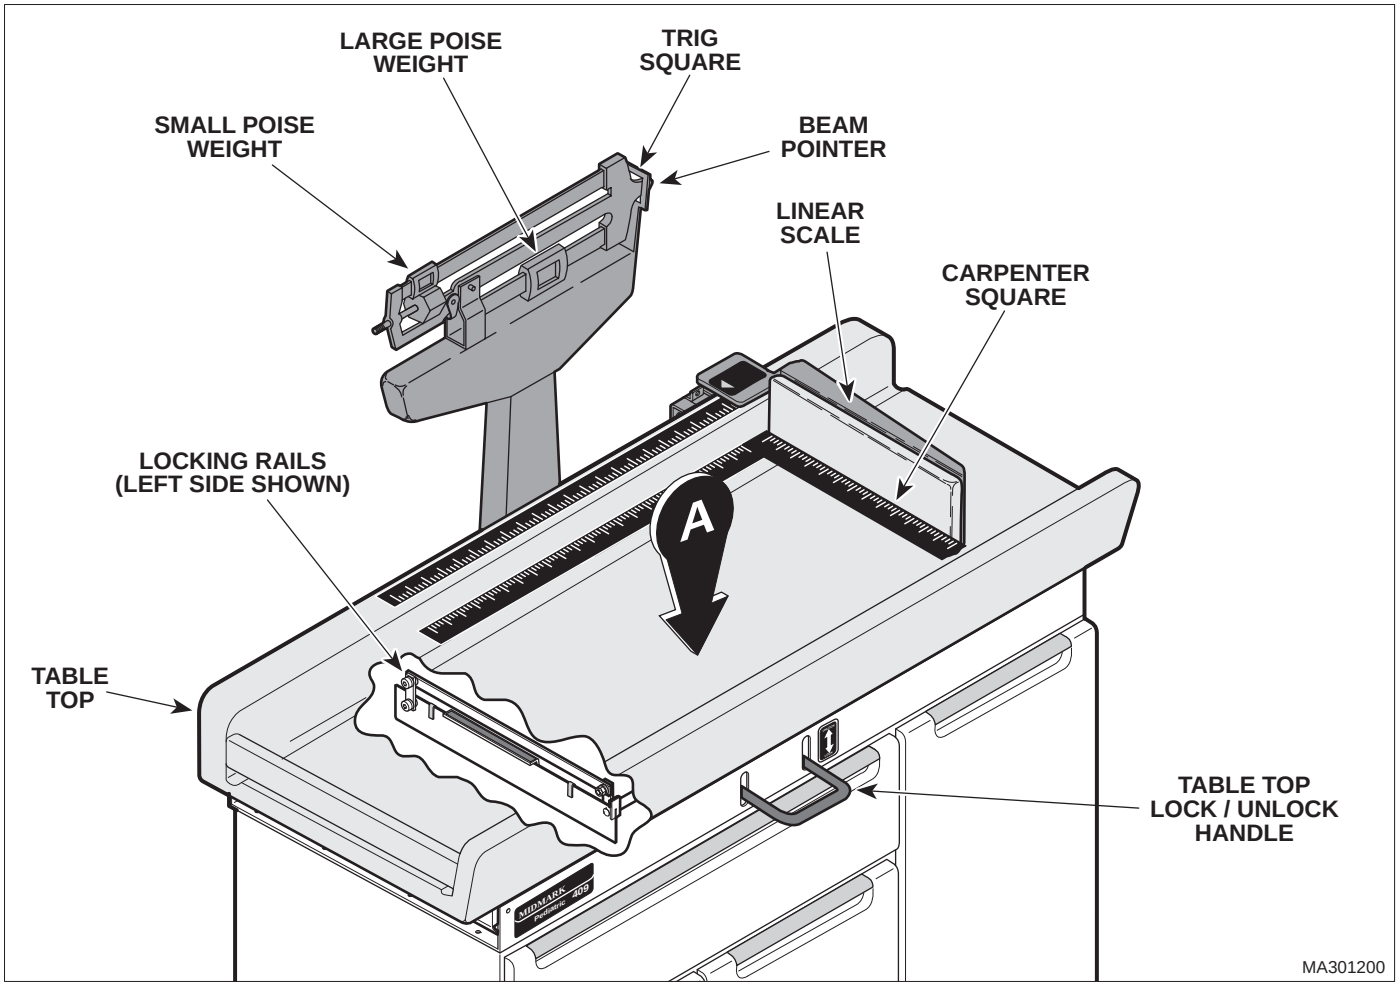

Figure 2-1. Operational Test

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Table 2-1. Troubleshooting Guide

Problem	Symptom	Probable Cause	Check	Correction
Table top will not lock properly.	When table top locking handle is moved to the LOCK position, the table top is not locked into stationary position (can still be moved).	Table top locking mechanism has bent, broken, or missing components.	Check for bent, broken, or missing components.	Replace any bent, broken, or missing components on the table top locking mechanism. Refer to para 4.5.
		Platform has worn "V" bearings or a broken pivot.	Check for worn "V" bearings or a broken pivot.	Replace platform components. Refer to para 4.5.
Weight scale does not measure weight accurately.	The beam pointer will not center when the large and small poise weights are set to zero.	The beam scale is not zeroed.	Check to see if the beam pointer centers when the large and small poise weights are set to zero.	If beam pointer does not center when when the large and small poise weights are set to zero, perform a zero balance adjustment. Refer to para 4.3.
	The measured weight of the patient seems to be inaccurate.	Paper roll is interfering with table top.	Check to see if paper roll is in contact with bottom of table top.	Reduce thickness of paper roll or remove paper roll.
		Locking rails are not releasing properly when table top locking handle is moved to the UNLOCK position.	Check for bent or missing components in the table top locking mechanism. See why locking rails are "hanging up".	Repair or replace any bent, broken, or missing components on the table top locking mechanism. Refer to para 4.5.
		Table is not level.	Check to see if table top is level.	Adjust four leveling screws, located on base of table, to level table.
		Patient is not being centered on the table top before being weighed.	Check to see if table operator is positioning patient properly.	Inform operator of correct patient positioning for weighing.
		Platform has worn "V" bearings or a broken pivot.	Check for worn "V" bearings or a broken pivot.	Replace platform components. Refer to para 4.5.
		Steel connecting rod which connects the beam scale and the weight platform is rubbing against inside of scale pillar.	Check to see if all wire hooks of steel connecting rod face toward the right side of the table.	Position all wire hooks so they face the right side of the table. Refer to para 4.2.
		Beam scale components are worn, resulting in beam scale being out of calibration.	Check the accuracy of the scale with known weights.	Calibrate the scale. Refer to para 4.4.
		Beam scale is out of calibration.	Check the accuracy of the scale with known weights.	Calibrate the scale. Refer to para 4.4.
Linear scale seems to be innaccurate.	Length measurements are innaccurrate.	Scale label is not positioned properly.	Use tape measure to check if scale label is positioned properly.	Reposition scale label.
		Linear scale is not square with back of table top.	Use a carpenter square to check squarness of linear scale with respect to the back of the table top.	Align the linear scale. Refer to para 4.6.

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Return To Table Of Contents

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

SECTION III
SCHEDULED MAINTENANCE

3.1 Scheduled Maintenance

Table 3-1 is a Scheduled Maintenance Chart which lists the inspections and services that should be performed periodically on the table. These inspections and services should be performed as often as indicated in the chart.

NOTE
The scheduled maintenance chart in Table 3-1 is based on units that have a scale; some units do not have a scale.

Table 3-1. Scheduled Maintenance Chart

Interval	Inspection or Service	What to Do
Semi-annually	Obvious damage	Visually check condition of examination table for obvious damage such as: cracks in components, missing components, dents in components, or any other visible damage which would cause examination table to be unsafe to operate or would compromise the performance of the table. Repair examination table as necessary.
	Fasteners / hardware	Check table for missing or loose fasteners / hardware. Replace any missing hardware and tighten any loose hardware as necessary.
	Warning and instructional decals	Check for missing or illegible decals. Replace decals as necessary.
	Pivot points / moving parts / accessories	Lubricate all exposed pivot points, moving parts, and accessories with silicone based lubricant. Refer to para 4.5 for access.
	Table top locking mechanism	Check that table top is stationary when table top locking handle is in the LOCK position. Check that table top floats freely on the scale platform when the table top locking handle is in the UNLOCK position. If not replace any bent, broken, or missing components on the table top locking mechanism. If necessary, replace platform components. Refer to para 4.5.
	Beam scale Accuracy	Check to see if beam scale reading matches a known weight placed on the table top. If not, calibrate the scale. Refer to para 4.4.
	Beam scales zero balance	Check to see if scale is zeroed. If not, perform a zero balance adjustment. Refer to para 4.3.
	Linear scale	Use carpenter square to ensure linear scale is square with back of table top when fully extended. If not, align the linear scale. Refer to para 4.6.
	Levelness of table	Check to see if table is level. If not, level table by adjusting leveling screws; there is one located at each corner of the table.
	Upholstery	Check upholstered table top for rips, tears, or excessive wear. Replace table top if necessary.
	Operational Test	Perform an Operational Test to determine if the table is operating within its specifications (Refer to para 2.1). Replace or adjust any malfunctioning components.

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Return To Table Of Contents

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

SECTION IV
MAINTENANCE / SERVICE INSTRUCTIONS

4.1 Introduction

DANGER
Refer to the Operator Manual for complete instructions on operating the table. Failure to do so could result in personal injury.

NOTE
Perform an operational test on the table after the repair is completed to confirm the repair was properly made and that *all* malfunctions were repaired.

Also, the following procedures are based on units that have a scale; some units do not have a scale.

The following paragraphs contain removal, installation, repair, and adjustment procedures for the table.

4.2 Beam Scale Components Removal / Installation

A. Removal

(1) Remove two screws (1, Figure 4-1), front cap (2), and back cap (3) from pillar assembly (4).

(2) Disconnect wire loop (A) from beam scale (5).

(3) Remove beam scale (5) from pillar assembly (4).

(4) Disconnect wire loops (B and C) and remove connection rod (6).

(5) Disconnect lever assembly (7) from wire loop (D) and remove lever assembly.

(6) Remove four locknuts (8) and pillar assembly (4) from base assembly (9).

B. Installation

(1) Install pillar assembly (4) on base assembly (9) and secure with four locknuts (8).

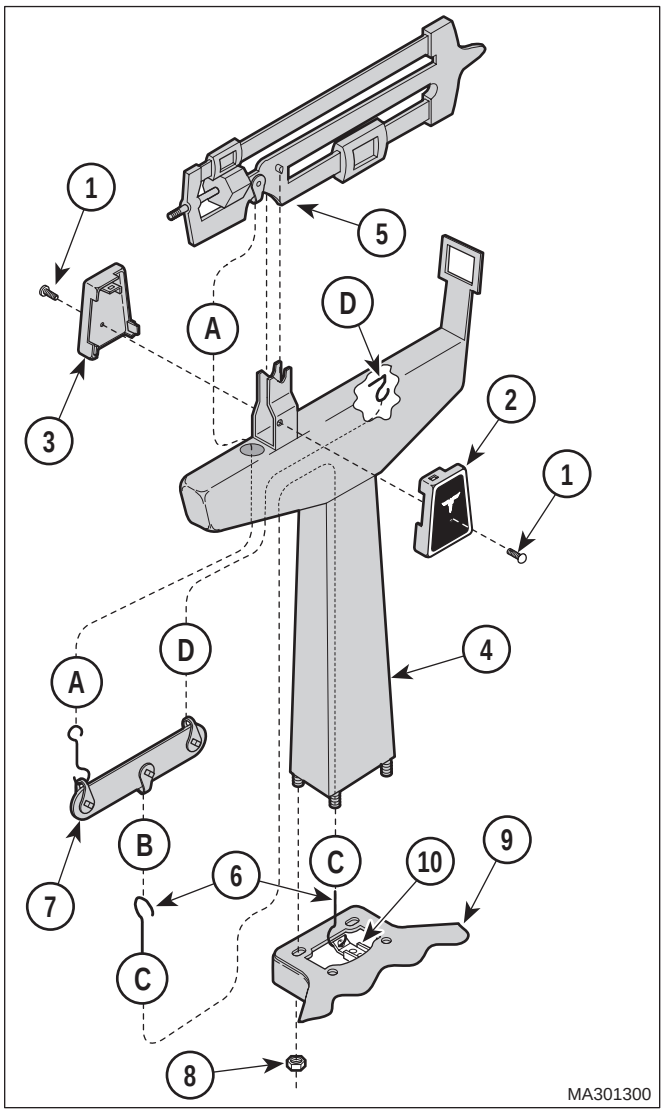

Figure 4-1. Beam Scale Components Removal / Installation

EQUIPMENT ALERT
The open ends of all wire loops must face the operator's right side of the table after being installed. Failure to do so will result in inaccurate readings.

(2) Position lever assembly (7) inside pillar assembly (4); then connect lever assembly to wire loop (D).

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

(3) Connect wire loop (B) of connection rod (6) to lever assembly (7); then connect wire loop (C) of connection rod (6) to calibrating arm (10).

(4) Install beam scale (5) on pillar assembly (4).

NOTE
Pull upward gently on wire loop (A) to create slack so wire loop can be connected to beam scale.

(5) Connect wire loop (A) of lever assembly (7) to beam scale (5).

(6) Install back cap (3) and front cap (2) over beam scale (5) and secure with two screws (1).

(7) Perform zero balance adjustment (Refer to para 4.3).

(8) Calibrate the scale (Refer to para 4.4).

4.3 Zero Balance Adjustment

A. Removal

(1) Move the table top locking handle (1, Figure 4-2) to UNLOCK position.

(2) Push down on center of table top (Point A) a few times to align and exercise all internal parts.

(3) Remove any items from table top.

(4) Set large poise weight (2) to zero setting, making sure it is seated in notch and set small poise weight (3) to zero setting by making sure the small poise weight is pushed firmly against shoulder of the beam (all the way to left).

(5) Observe. The beam pointer (4) should center in the trig square (5), indicating the scale is zeroed.

(6) If the beam pointer (4) centers, no adjustment is necessary. If the beam pointer does not center, go to step 7.

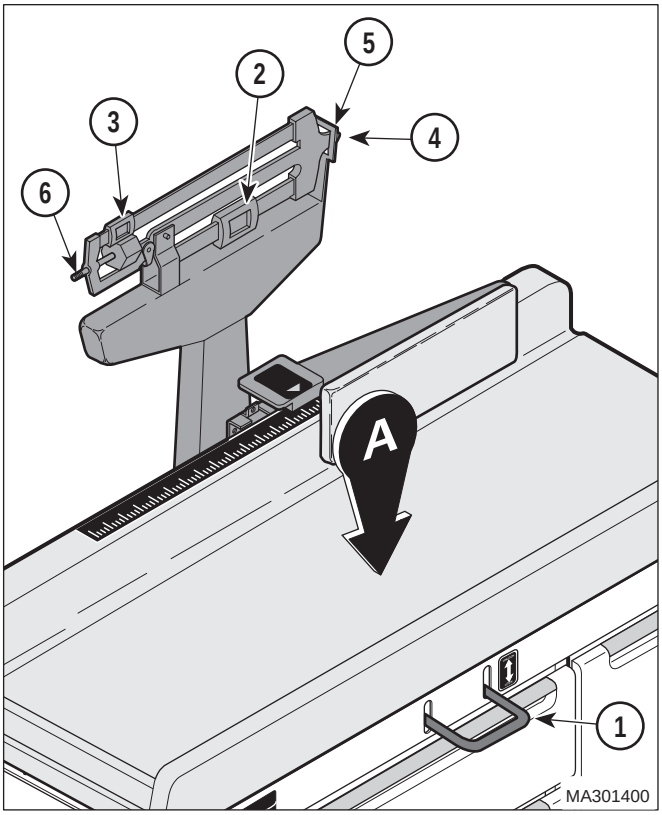

Figure 4-2. Zero Balance Adjustment

NOTE
If the beam pointer touches the bottom of the trig square or stabilizes below the centerline of the trig square, turn the zero adjustment screw in a clockwise direction. If the beam pointer touches the top of the trig square or stabilizes above the centerline of the trig square, turn the zero adjustment screw in a counterclockwise direction.

(7) Turn the zero adjustment screw (6) in or out until the beam pointer (4) centers in the trig square (5).

4.4 Scale Calibration

A. Removal

(1) Move the table top locking handle (1, Figure 4-3) to UNLOCK position.

(2) Push down on center of table top a few times to align and exercise all internal parts.

(3) Remove any items from table top.

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

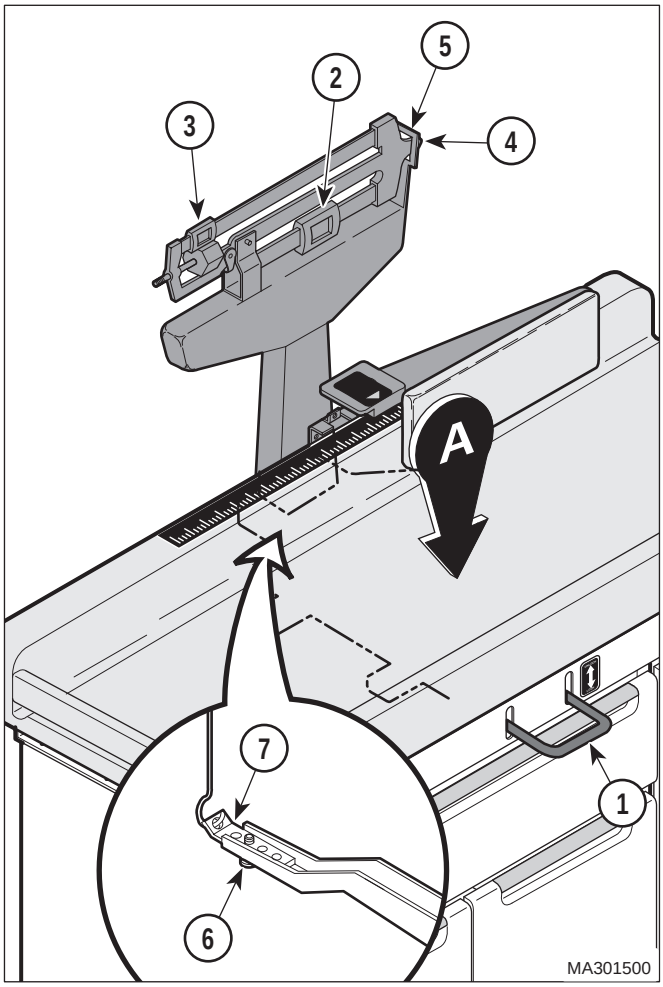

Figure 4-3. Scale Calibration

NOTE
Using a test weight between 20 to 40 lbs. (9.0 to 18.1 kgs.) is recommended.

(4) Place a test weight, or a weight which has been measured with a calibrated scale known to be accurate, on the center of the table top (Point A).

(5) Using the large poise weight (2) and small poise weight (3), set scale to a setting which is equal to test weight.

(6) If the beam pointer (4) centers in trig square (5), no adjustment is necessary. If the beam pointer does not center in trig square, go to step 7.

NOTE
If the beam pointer touches the bottom of the trig square or stabilizes below the centerline of the trig square, push the calibrating arm inward. If the beam pointer touches the top of the trig square or stabilizes above the centerline of the trig square, pull the calibrating arm outward.

(7) Loosen screw (6); then pull the calibrating arm (7) inward or outward, as determined in the above note, until the beam pointer (4) is centered in the trig square (5). Tighten screw (6).

4.5 Platform Components Access or Removal / Installation

A. Removal

NOTE
Performing steps 1 and 2 will gain access to platform components. Performing steps 1 thru 4 will remove platform assembly.

(1) Pull drawer (1, Figure 4-4) out until resistance is felt; then firmly grasp drawer and continue to pull *straight* out until drawer is removed from table.

(2) Remove four screws (2), lockwashers (3), washers (4), and table top (5) from base (6).

(3) Remove screw (7) and calibrating arm (8) from platform arm (9) and wire hook (10).

(4) Remove four nuts (11) and beam scale assembly (12) from platform (13).

(5) Remove four screws (14), lockwashers (15), and platform (13) from table top (5).

B. Installation

(1) Install platform (13) on table top (5) and secure with four lockwashers (15) and screws (14).

NOTE
If installing a new beam scale, skip steps 2 and 3. Then after step 5, install the new beam scale components (Refer to para 4.2).

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

SECTION IV
MAINTENANCE / SERVICE

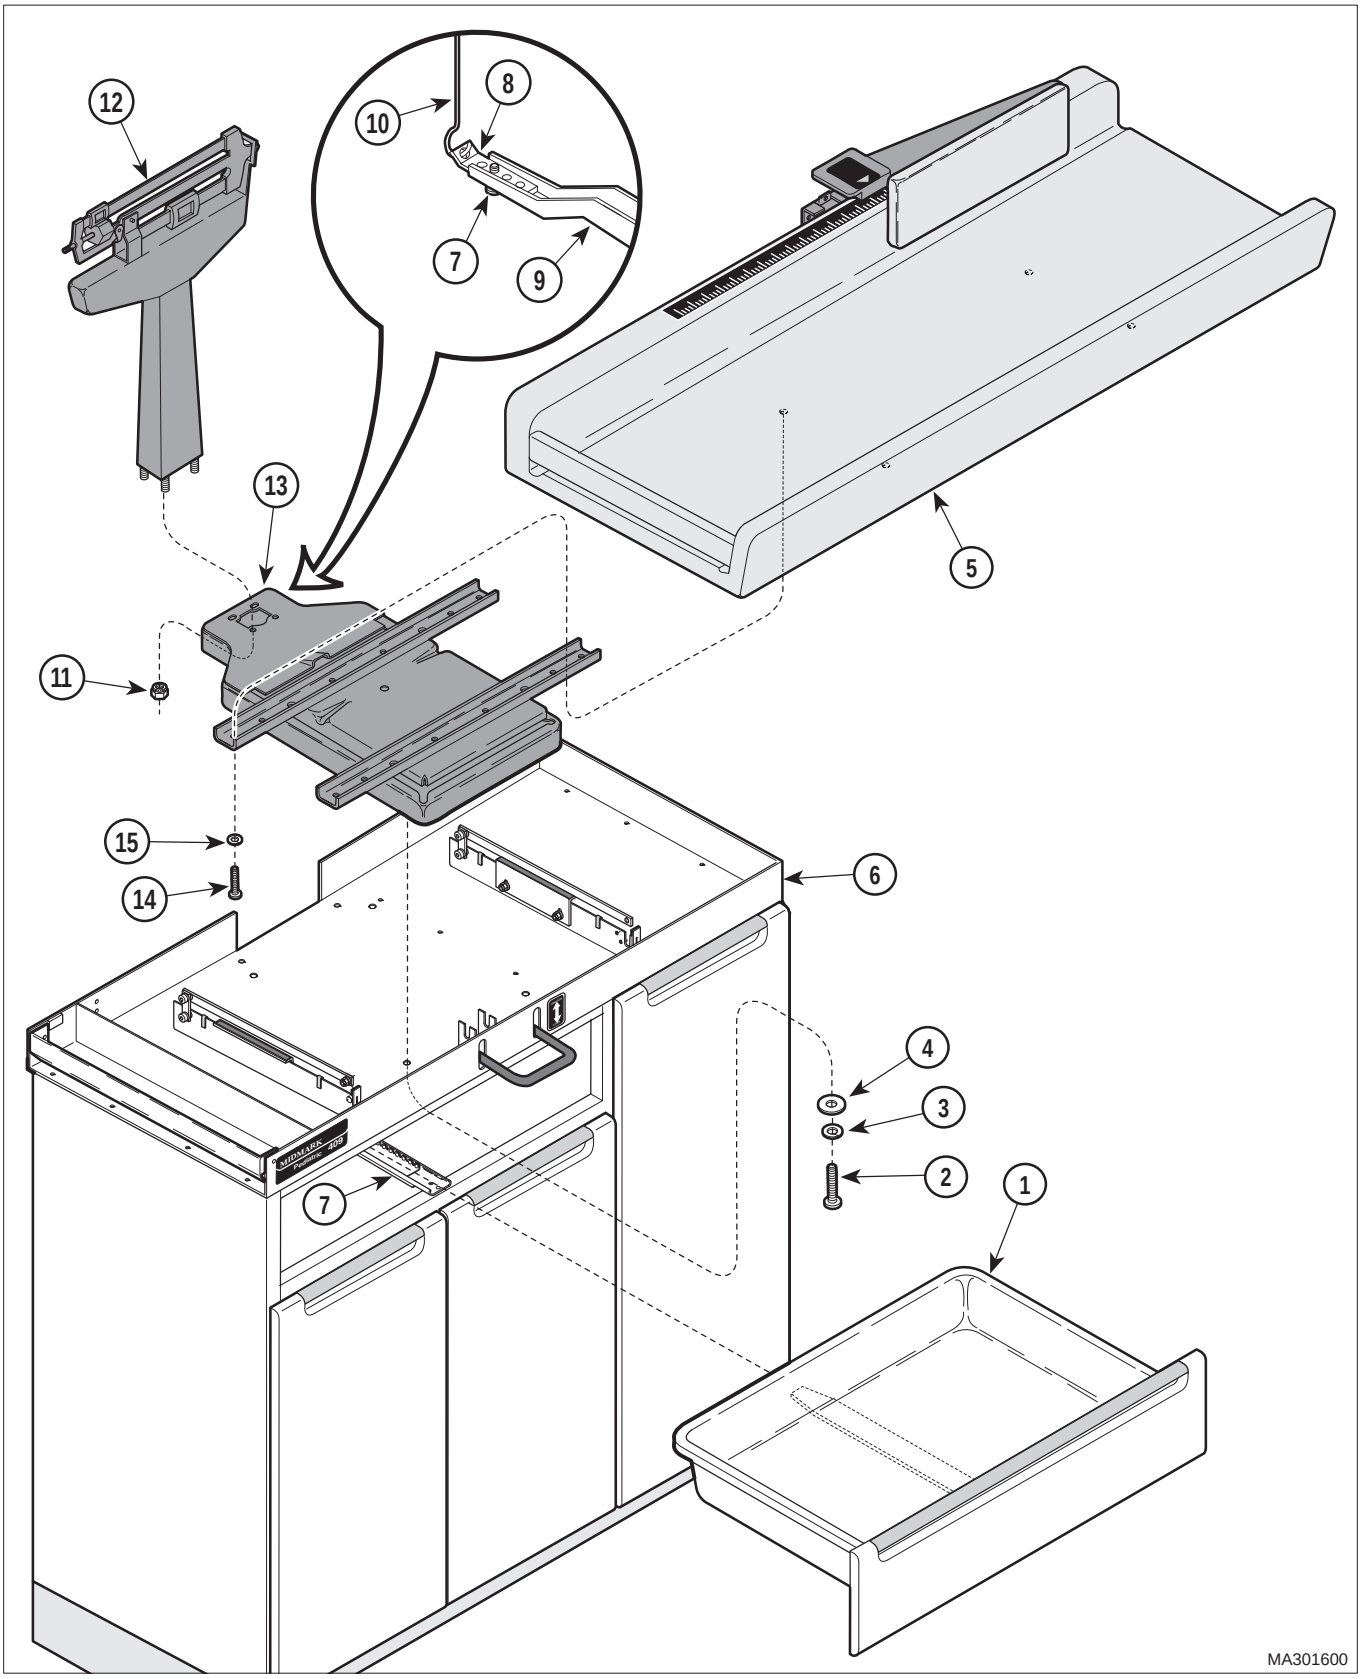

Figure 4-4. Platform Components Removal / Installation

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

(2) Install beam scale assembly (12) on platform (13) and secure with four nuts (11).

(3) Install calibrating arm (8) on platform arm (9) and wire hook (1) and secure in position with screw (7).

(4) Install table top (5) on base (6) and secure with four washers (4), lockwashers (3), and screws (2).

(5) Install drawer (1) by pushing drawer *straight* into drawer slide (7).

4.6 Linear Scale Alignment

A. Removal

(1) Open linear scale (1, Figure 4-5) to its fully extended position as shown in illustration.

(2) Using a carpenter square, check to see if the linear scale (1) is square with the back of the table top (2) when the scale is fully extended.

(3) If linear scale (1) is not square, adjust setscrew (3) until linear scale is square with the back of the table top (2).

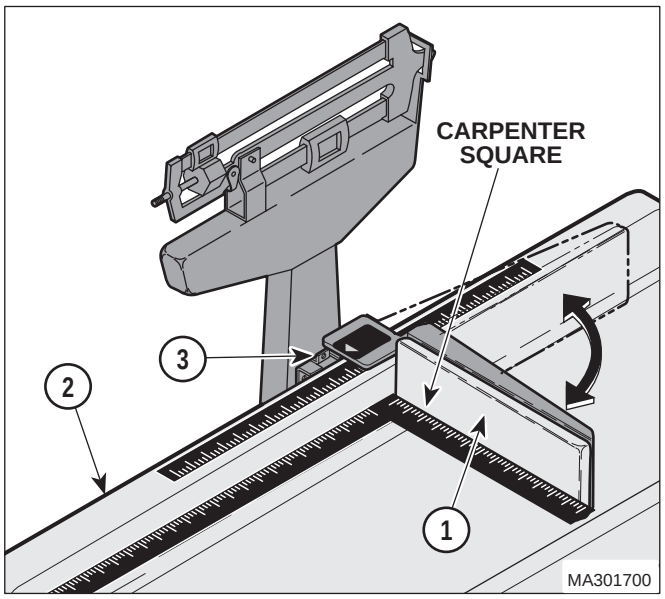

Figure 4-5. Linear Scale Alignment

Return To Table Of Contents

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

SECTION V
SCHEMATICS AND DIAGRAMS

None are required.

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Return To Table Of Contents

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

SECTION VI
PARTS LIST

6.1 Introduction

The illustrated parts list provides information for identifying and ordering the parts necessary to maintain the unit in peak operating condition. Refer to paragraph 1.5 for parts ordering information.

The parts list also illustrates disassembly and assembly relationships of parts.

6.2 Description of Columns

The *Item* column of the parts list gives a component its own unique number. The same number is given to the component in the parts illustration. This allows a part number of a component to be found if the technician can visually spot the part on the illustration. The technician simply finds the component in question on the illustration and notes the item number of that component. Then, he finds that item number in the parts list. The row corresponding to the item number gives the technician the part number, a description of the component, and quantity of parts per subassembly. Also, if a part number is known, the location of that component can be determined by looking for the item number of the component on the illustration.

The *Part No.* column lists the MIDMARK part number for that component.

The *Description* column provides a physical description of the component.

The *Qty.* column lists the number of units of a particular component that is required for the subassembly. The letters “AR” denote “as required” when quantities of a particular component cannot be determined, such as: adhesive.

Bullets [•] in the *Part No.* column and the *Description* column show the indenture level of a component. If a component does not have a bullet, it is a main component of that illustration. If a component has a bullet, it is a subcomponent of the next component listed higher in the parts list than itself that does not have a bullet. Likewise, if a component has two bullets, it is a subcomponent of the next component listed higher in the parts list than itself that has only one bullet.

6.3 Torque Specifications and Important Assembly Notes

When specific assembly torque specifications, measurements, or procedures have been identified, by our engineering department, as required to assure proper function of the unit, those torque specifications measurements, and procedures will be noted on the parts illustrations. Adherence to these requirements is essential.

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Pictorial Index

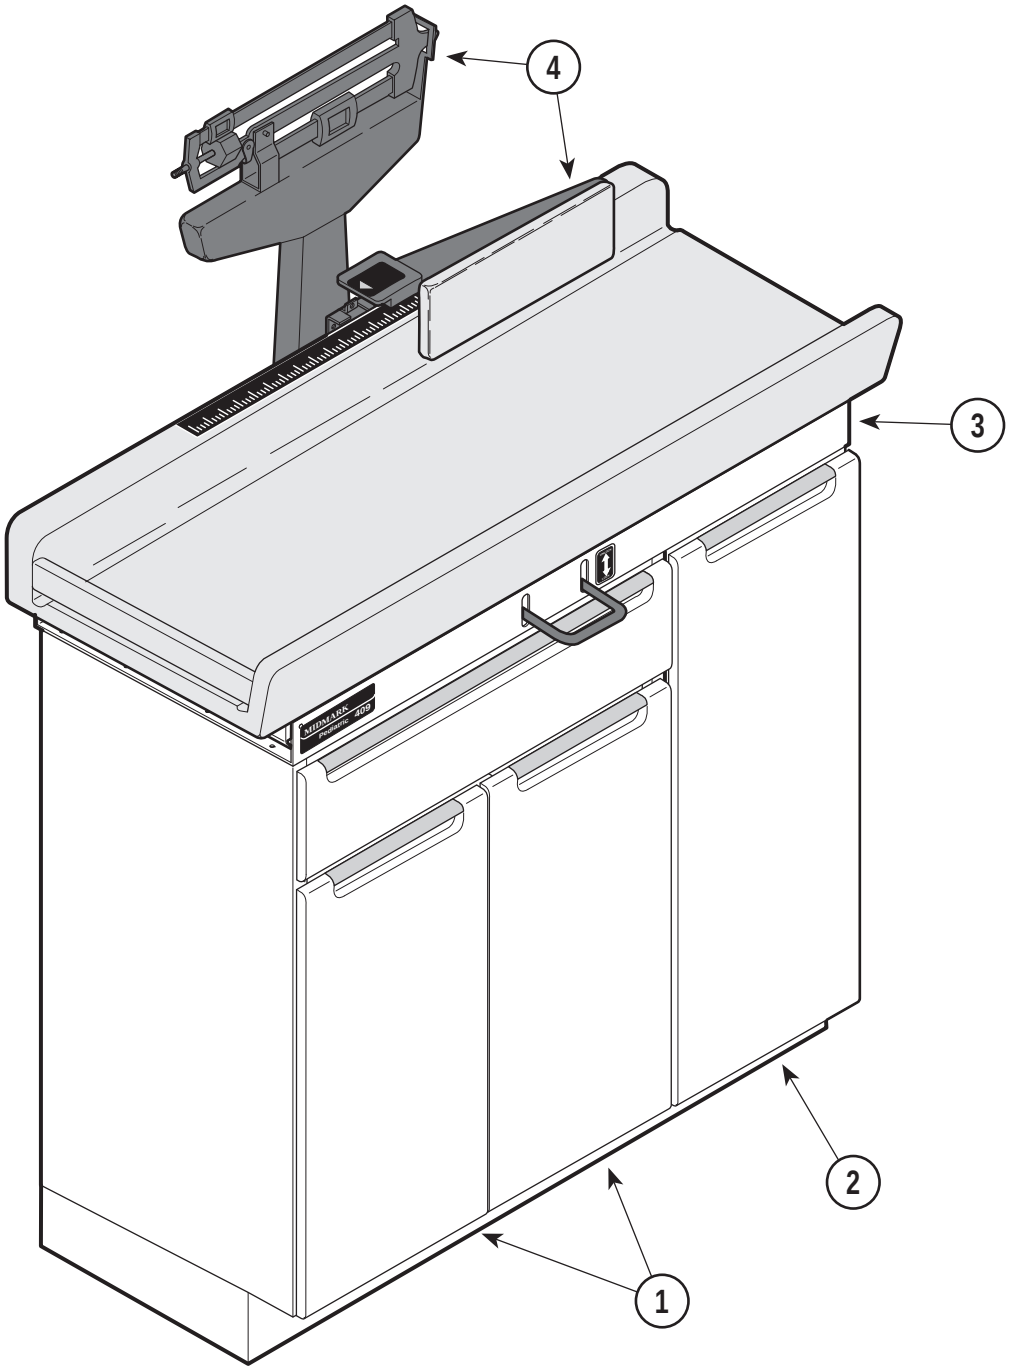

MA297600

Item	Part No.	Description	Page
	409-001	Pediatric Examination Table (With Scale)	Ref
	409-002	Pediatric Examination Table (Without Scale)	Ref
1	•	• Left Hand Cabinet Assembly	6-3
2	•	• Right Hand Cabinet Assembly	6-4
3	•	Upper Wrap Assembly (Without Scale)	6-5
4	•	• Upper Wrap Assembly (With Mechanical Scale)	6-6
5	•	• Table Top Assembly (Without Scale)	6-7
6	•	• Table Top Assembly (With Mechanical Scale)	6-8

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Left Hand Cabinet Assembly

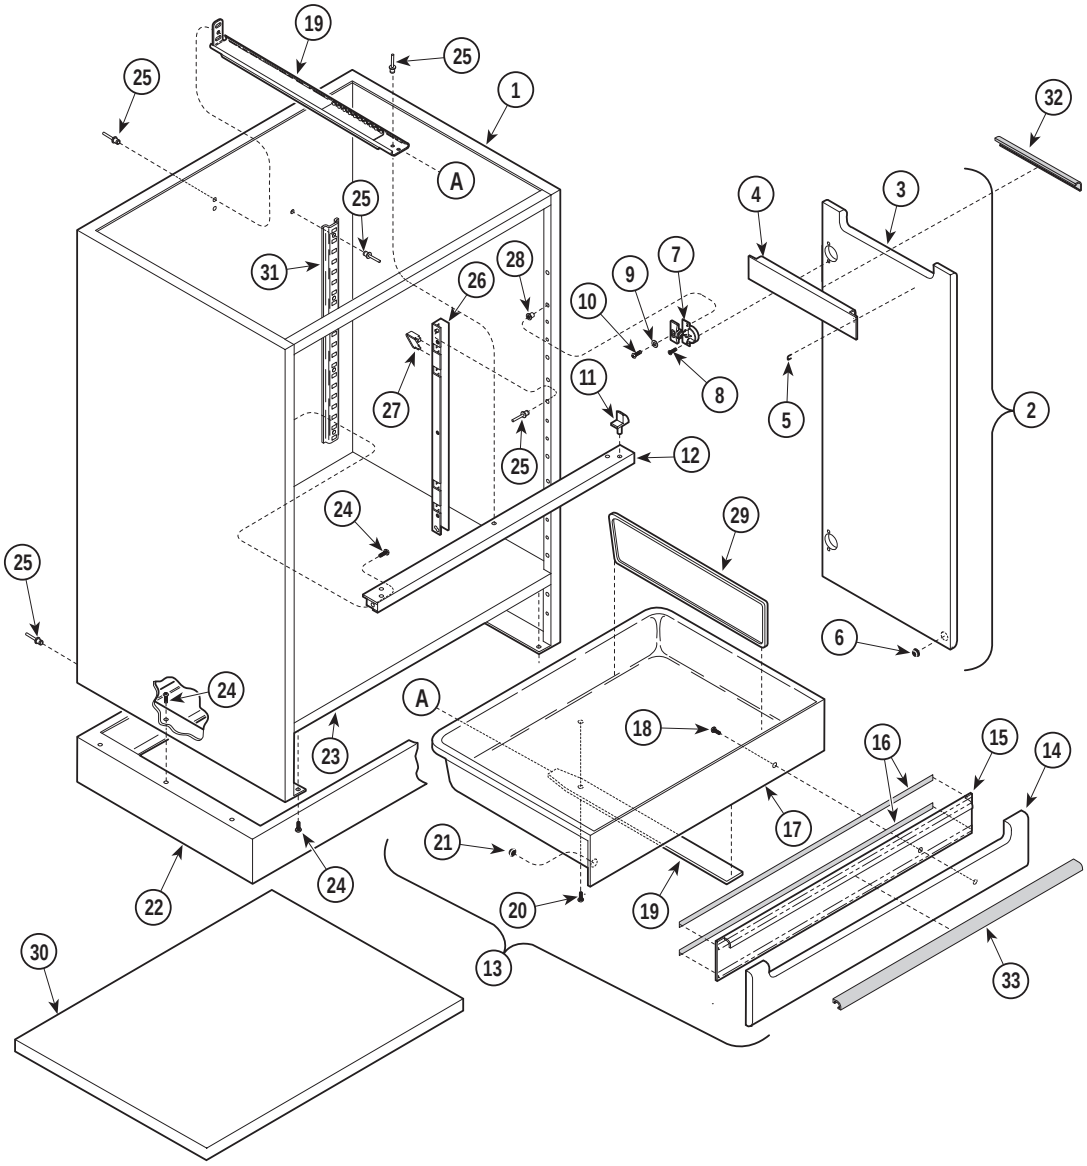

MA297000

Used on units with Serial Number CW-1000 thru CW-1631

Item	Part No.	Description	Qty.
1	030-0627-10	Cabinet Weldment	1
2	029-0607-02	Cabinet Door Assembly - L.H. (Includes Items 3 thru 8 [Not Shown])	1
	029-0607-03	Cabinet Door Assembly - R.H. (Includes Items 3 thru 8 [Shown])	1
3	• 062-9909-00	• Cabinet Door - L.H.(Not Shown)	1
	• 062-9910-00	• Cabinet Door - R.H.(Shown)	1
4	• 021-0017-01	• Cabinet Door Pull	1
5	• 042-0050-03	• Staple	5
6	• 053-0013-00	• Self Sticking Bumper	1
7	• 016-0510-00	• Door Hinge	2
8	• 040-0006-40	• Screw	4
9	045-0001-08	Washer	4
10	040-0010-12	Screw	4
11	053-0004-00	Drawer Guide	2
12	050-1631-10	Cabinet Mullion	1
13	029-0609-00	Drawer Assy. (Incl. Items 14 thru 21)	1
14	• 055-7203-00	• Drawer Front	1
15	• 021-0017-02	• Cabinet Door Pull	1
16	• 042-0075-01	• Foam Tape	42"
17	• 053-0266-02	• Cabinet Drawer	1
18	• 040-0006-63	• Screw	10
19	• 016-0160-00	• Drawer Slide	1
20	• 040-0008-26	• Screw	1
21	• 053-0013-00	• Self Sticking Bumper	2
22		Base Weldment (Refer to "Right Hand Cabinet Assembly" Elsewhere)	1
23	050-2705-10	Cabinet Bottom	1
24	040-0010-00	Screw	12
25	042-0010-04	Pop Rivet	19
26	050-3548-10	Shelf Support Bracket	2
27	016-0023-00	Shelf Support	4
28	042-0045-01	Nutsert	4
29	053-0012-01	Drawer Divider	3
30	050-1294-00	Cabinet Shelf	1
31	016-0024-00	Shelf Standard	2
32	029-0606-XX	Door Pull (Specify Color)	2
33	029-0605-XX	Drawer Pull (Specify Color)	1

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Left Hand Cabinet Assembly

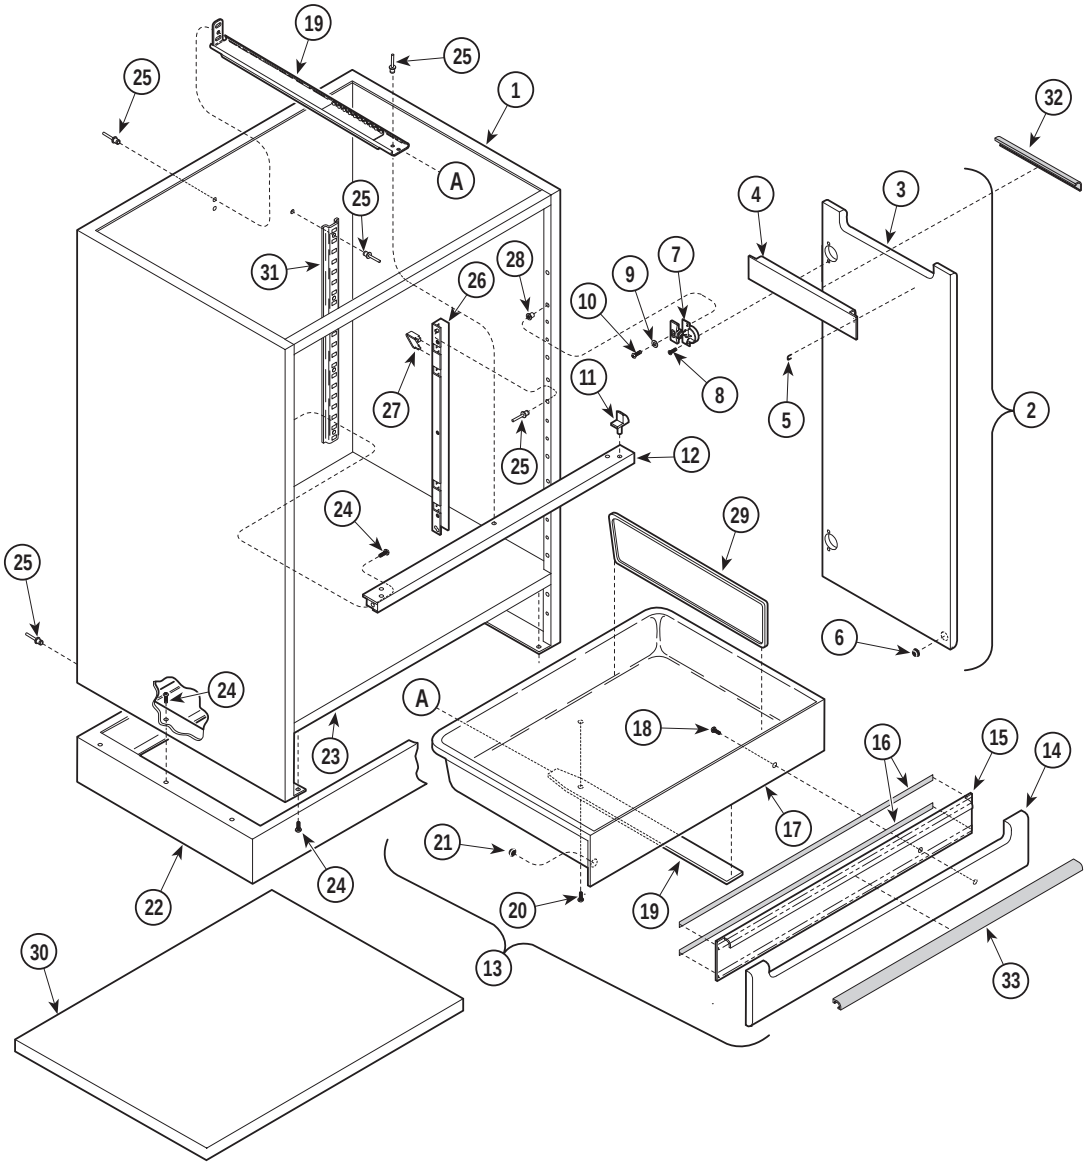

MA297000

Used on units with Serial Number CW-1632 thru Present

Item	Part No.	Description	Qty.
1	030-0905-10	Cabinet Weldment	1
2	029-0607-02	Cabinet Door Assembly - L.H. (Includes Items 3 thru 8 [Not Shown])	1
	029-0607-03	Cabinet Door Assembly - R.H. (Includes Items 3 thru 8 [Shown])	1
3	• 062-9909-00	• Cabinet Door - L.H.(Not Shown)	1
	• 062-9910-00	• Cabinet Door - R.H.(Shown)	1
4	• 021-0017-01	• Cabinet Door Pull	1
5	• 042-0050-03	• Staple	5
6	• 053-0013-00	• Self Sticking Bumper	1
7	• 016-0510-00	• Door Hinge	2
8	• 040-0006-40	• Screw	4
9	045-0001-08	Washer	4
10	040-0010-12	Screw	4
11	053-0004-00	Drawer Guide	2
12	050-1631-10	Cabinet Mullion	1
13	029-0609-00	Drawer Assy. (Incl. Items 14 thru 21)	1
14	• 055-7203-00	• Drawer Front	1
15	• 021-0017-02	• Cabinet Door Pull	1
16	• 042-0075-01	• Foam Tape	42"
17	• 053-0266-02	• Cabinet Drawer	1
18	• 040-0006-63	• Screw	10
19	• 016-0160-00	• Drawer Slide	1
20	• 040-0008-26	• Screw	1
21	• 053-0013-00	• Self Sticking Bumper	2
22		Base Weldment (Refer to "Right Hand Cabinet Assembly" Elsewhere)	1
23	050-2705-10	Cabinet Bottom	1
24	040-0010-00	Screw	12
25	042-0010-04	Pop Rivet	19
26	050-3548-10	Shelf Support Bracket	2
27	016-0023-00	Shelf Support	4
28	042-0045-01	Nutsert	4
29	053-0012-01	Drawer Divider	3
30	050-1294-00	Cabinet Shelf	1
31	016-0024-00	Shelf Standard	2
32	029-0606-XX	Door Pull (Specify Color)	2
33	029-0605-XX	Drawer Pull (Specify Color)	1

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Right Hand Cabinet Assembly

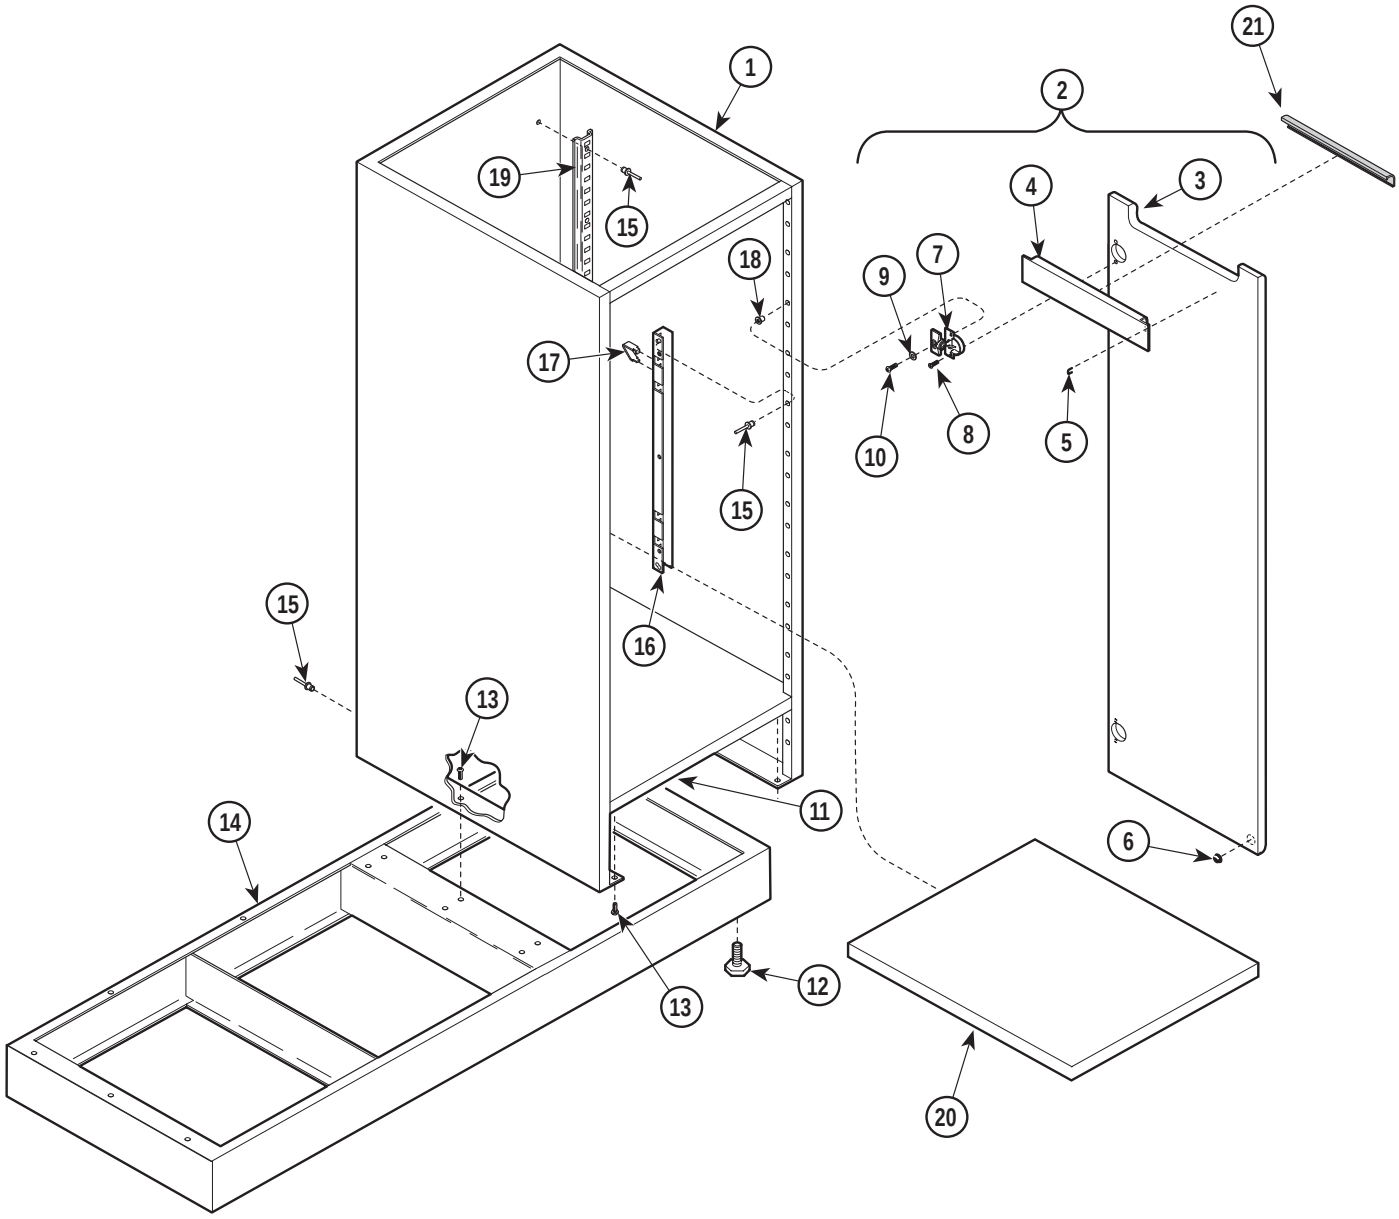

MA296900

Used on units with Serial Number CW-1000 thru CW-1631

Item	Part No.	Description	Qty.
1	030-0626-10	Cabinet Weldment	1
2	029-0616-00	Cabinet Door Assembly - R.H. (Includes Items 3 thru 8)	1
3	• 062-9919-00	• Cabinet Door - R.H.	1
4	• 021-0017-03	• Cabinet Door Pull	1
5	• 042-0050-03	• Staple	5
6	• 053-0013-00	• Self Sticking Bumper	1
7	• 016-0510-00	• Door Hinge	2
8	• 040-0006-40	• Screw	4
9	045-0001-08	Washer	2
10	040-0010-12	Screw	2
11	050-2704-10	Cabinet Bottom	1
12	016-0001-00	Leveling Screw	4
13	040-0010-00	Screw	9
14	030-0704-00	Base Weldment	1
15	042-0010-04	Pop Rivet	16
16	050-3548-10	Shelf Support Bracket	2
17	016-0023-00	Shelf Support	4
18	042-0045-01	Nutsert	4
19	016-0024-00	Shelf Standard	2
20	050-1294-01	Cabinet Shelf	2
21	029-0617-XX	Door Pull (Specify Color)	1

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Right Hand Cabinet Assembly

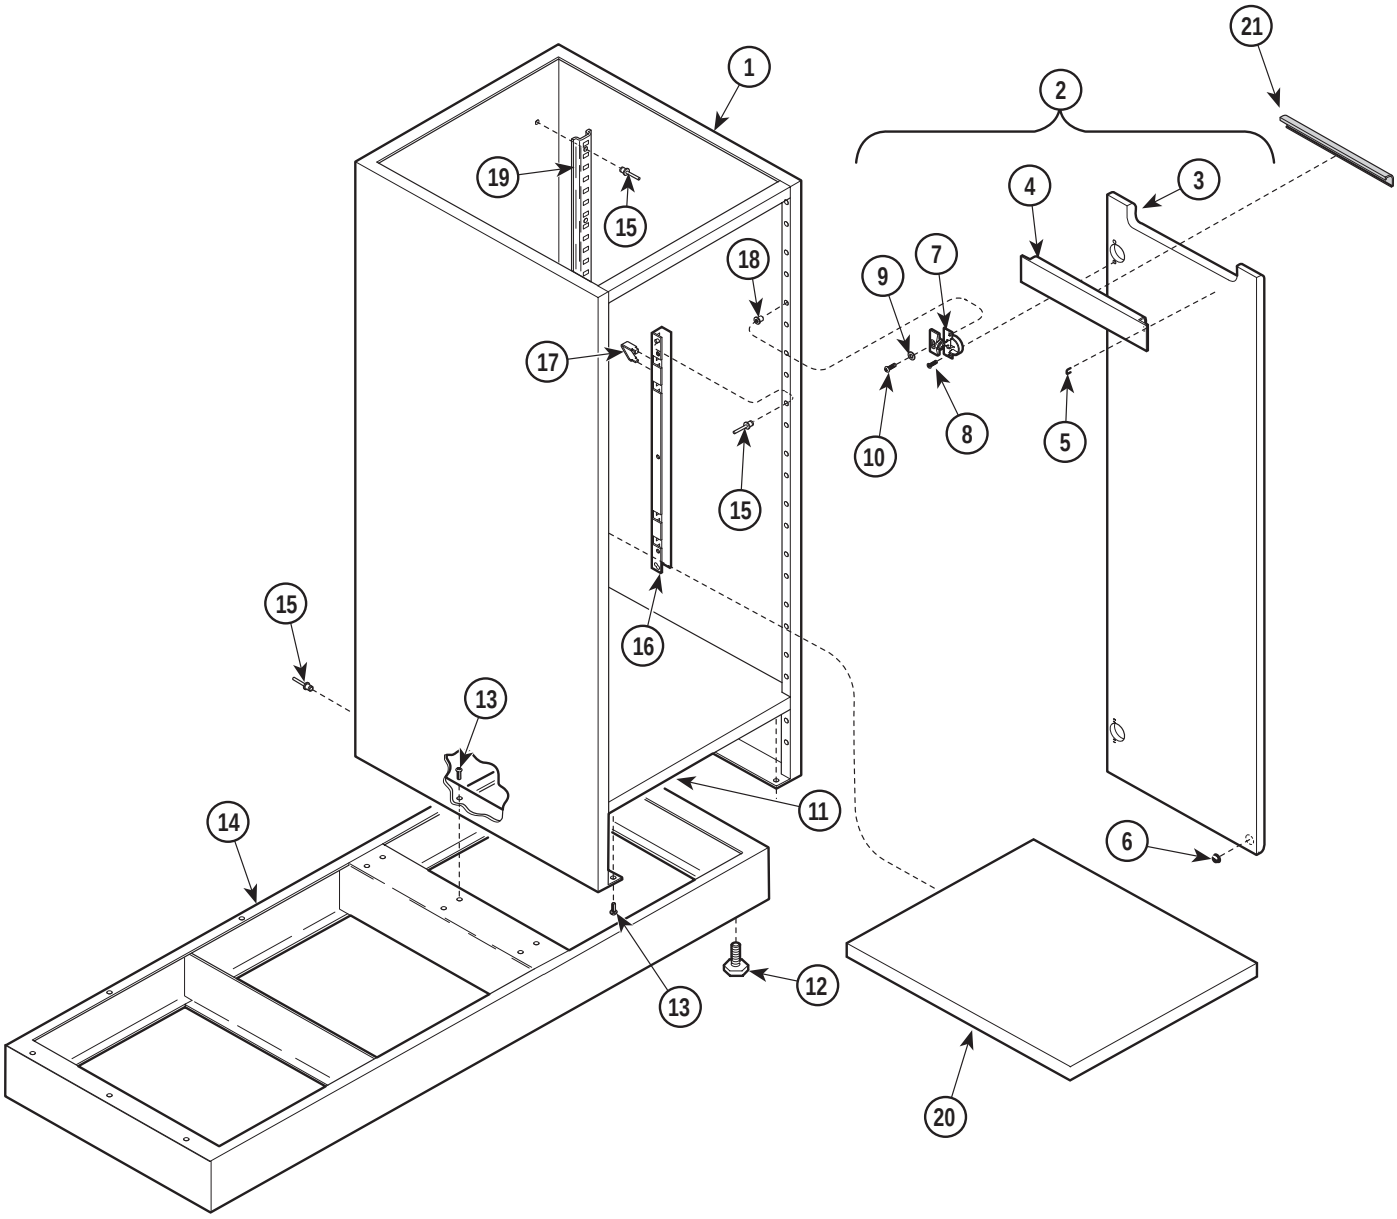

MA296900

Used on units with Serial Number CW-1632 thru Present

Item	Part No.	Description	Qty.
1	030-0904-10	Cabinet Weldment	1
2	029-0616-00	Cabinet Door Assembly - R.H. (Includes Items 3 thru 8)	1
3	• 062-9919-00	• Cabinet Door - R.H.	1
4	• 021-0017-03	• Cabinet Door Pull	1
5	• 042-0050-03	• Staple	5
6	• 053-0013-00	• Self Sticking Bumper	1
7	• 016-0510-00	• Door Hinge	2
8	• 040-0006-40	• Screw	4
9	045-0001-08	Washer	2
10	040-0010-12	Screw	2
11	050-2704-10	Cabinet Bottom	1
12	016-0001-00	Leveling Screw	4
13	040-0010-00	Screw	9
14	030-0704-00	Base Weldment	1
15	042-0010-04	Pop Rivet	16
16	050-3548-10	Shelf Support Bracket	2
17	016-0023-00	Shelf Support	4
18	042-0045-01	Nutsert	4
19	016-0024-00	Shelf Standard	2
20	050-1294-01	Cabinet Shelf	2
21	029-0617-XX	Door Pull (Specify Color)	1

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Upper Wrap Assembly (No Scale)

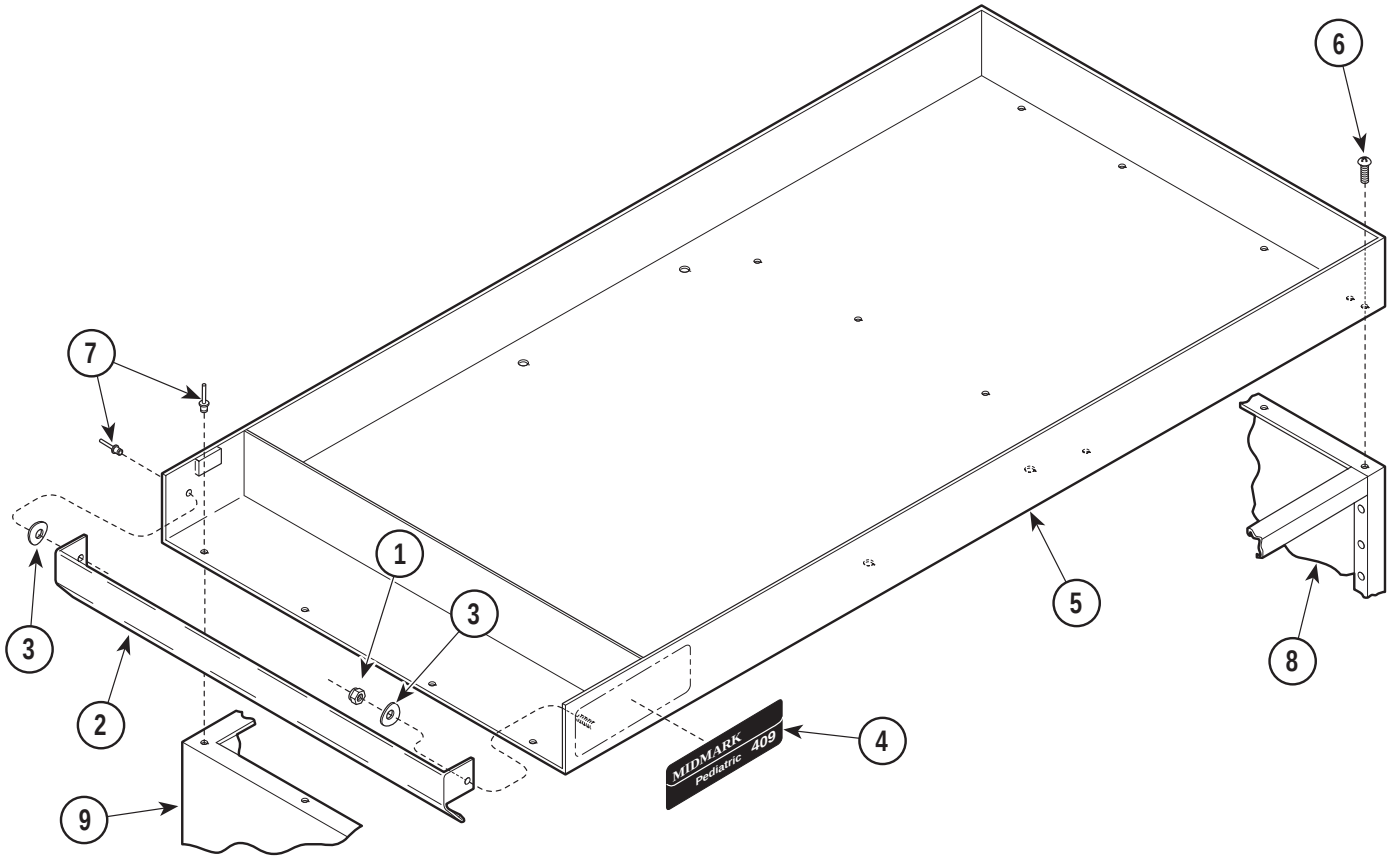

MA297300

Used on units with Serial Number CW-1000 thru CW-1631

Item	Part No.	Description	Qty.
1	041-0010-02	Nut	1
2	050-1760-10	Paper Roll Door	1
3	045-0001-12	Curved Washer	2
4	053-0297-00	409 Nameplate	1
5	030-0706-11	Upper Wrap Weldment	1
6	040-0010-18	Screw	8
7	042-0010-04	Pop Rivet	5
8		Cabinet (Refer to "Right Hand Cabinet Assembly" Elsewhere)	Ref
9		Cabinet (Refer to "Left Hand Cabinet Assembly" Elsewhere)	Ref

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Upper Wrap Assembly (No Scale)

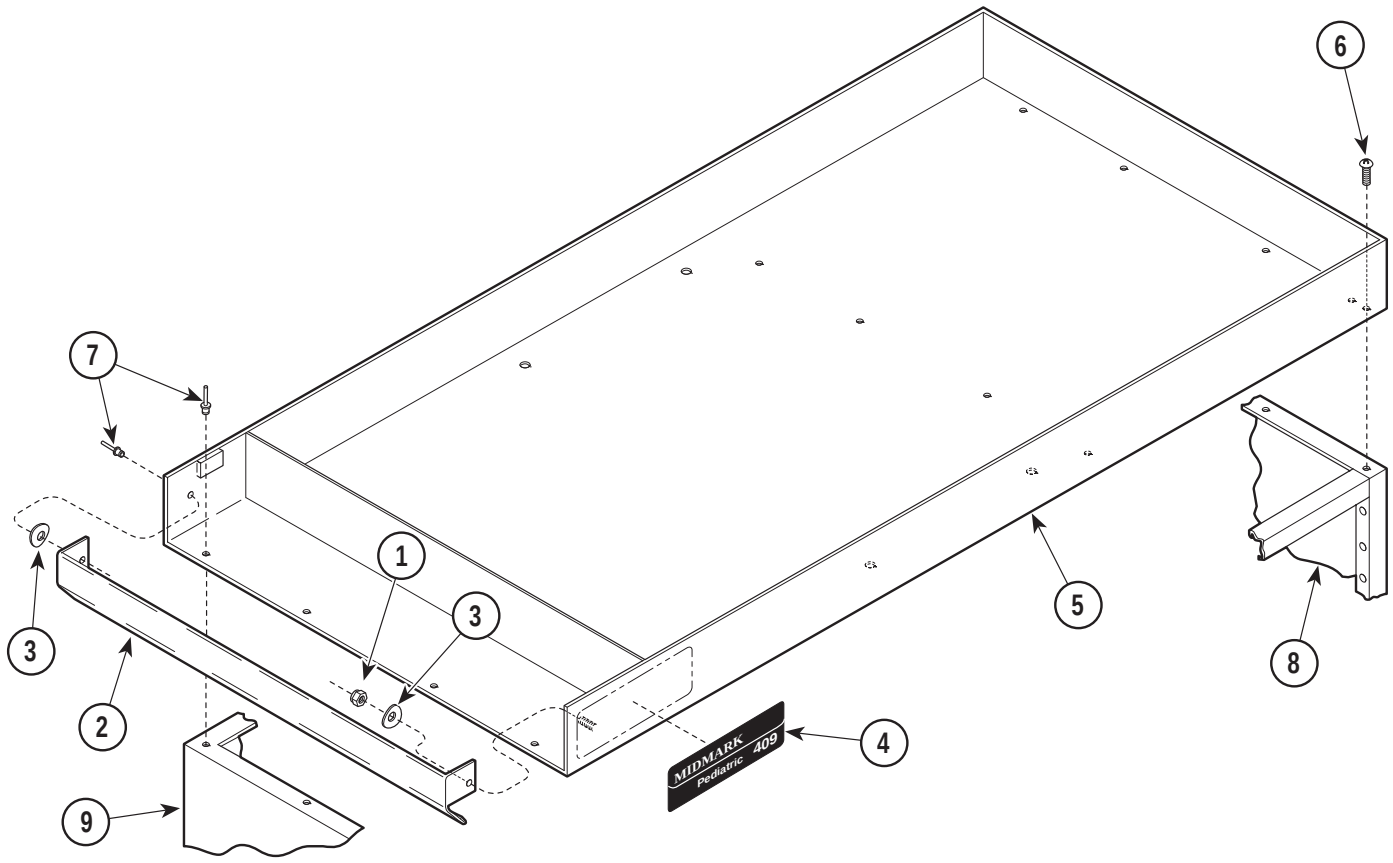

MA297300

Used on units with Serial Number CW-1632 thru Present

Item	Part No.	Description	Qty.
1	041-0010-02	Nut	1
2	050-1760-10	Paper Roll Door	1
3	045-0001-12	Curved Washer	2
4	053-0297-00	409 Nameplate	1
5	030-0907-10	Upper Wrap Weldment	1
6	040-0010-18	Screw	8
7	042-0010-04	Pop Rivet	5
8		Cabinet (Refer to "Right Hand Cabinet Assembly" Elsewhere)	Ref
9		Cabinet (Refer to "Left Hand Cabinet Assembly" Elsewhere)	Ref

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Upper Wrap Assembly (Mechanical Scale)

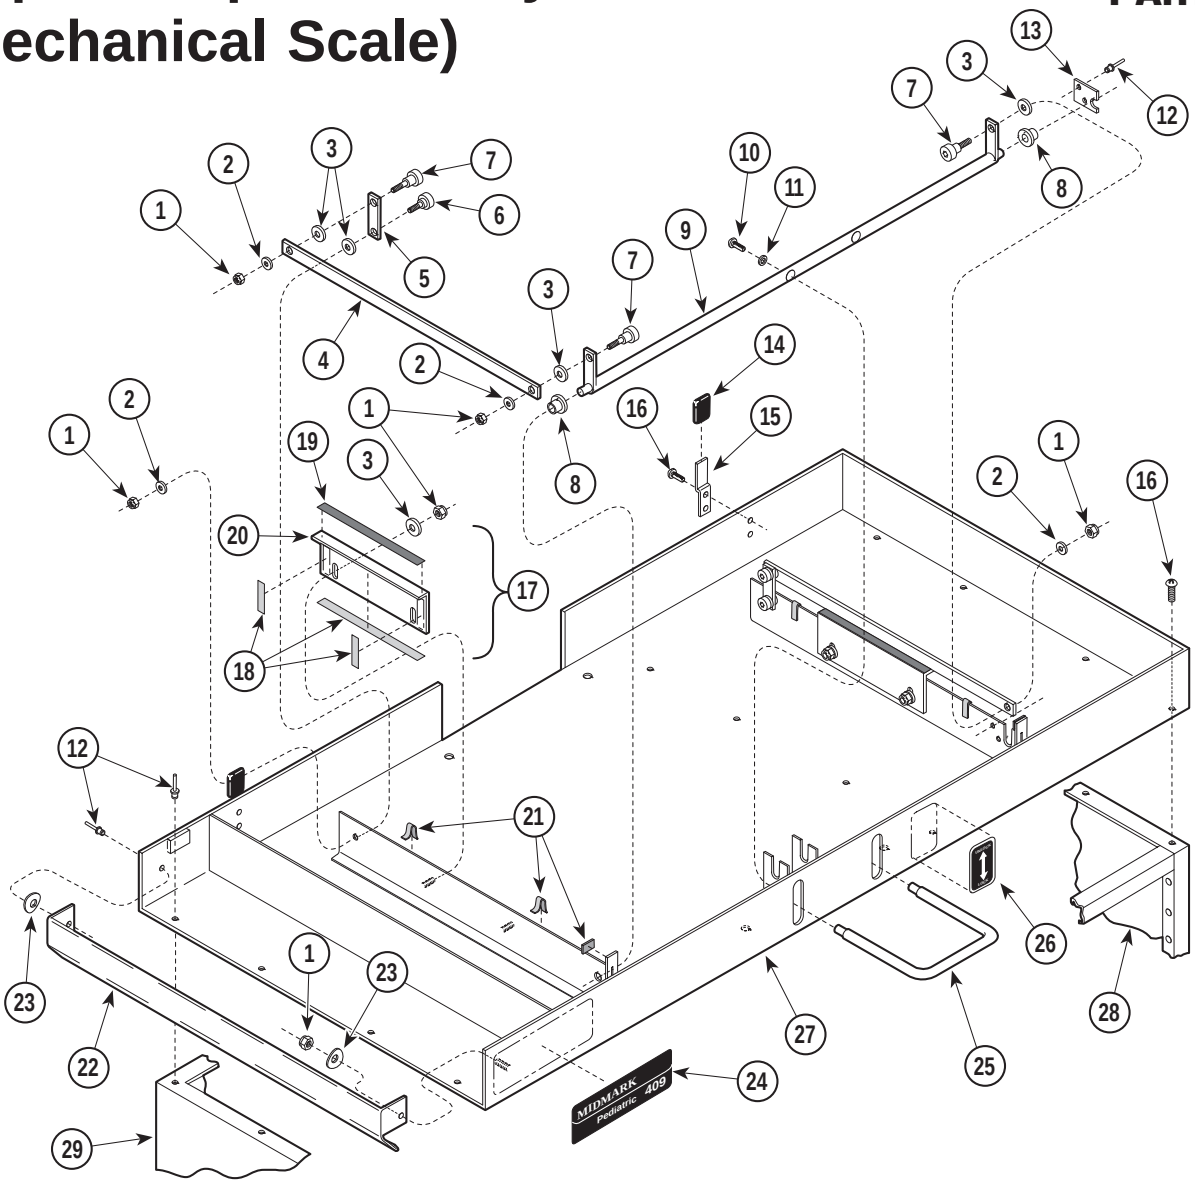

MA297100

Used on units with Serial Number CW-1000 thru CW-1328

Item	Part No.	Description	Qty.
1	041-0010-02	Nut	11
2	053-0382-00	Plastic Washer	6
3	053-0382-01	Plastic Washer	10
4	051-0630-00	Tie Bar	2
5	051-0627-00	Lever Bar	2
6	040-0010-85	Shoulder Screw	2
7	042-0014-21	Shoulder Screw	4
8	053-0114-00	Nylon Bearing	2
9	030-0707-00	Pivot Rod Weldment	1
10	040-0010-50	Screw	2
11	045-0001-35	Washer	2
12	042-0010-04	Pop Rivet	8
13	050-1768-00	Retaining Clip	1
14	053-0386-00	Vinyl Sleeve	2
15	050-1761-10	Stop Bracket	2
16	040-0010-18	Screw	12
17	029-1269-00	Bracket Assembly (Includes Items 18 thru 20)	2
18	• 053-0018-00	• Nylon Tape (Sold by the Inch)	14
19	• S071-00010	• Neophrene (Sold by the Foot)	1
20	• 050-1759-00	• Lock Bracket	1
21	S071-00010	Neophrene (Sold by the Foot)	1
22	050-1760-10	Paper Roll Door	1
23	045-0001-12	Curved Washer	2
24	053-0297-00	409 Nameplate	1
25	051-0631-00	Lock Handle	1
26	061-0274-00	Lock/Unlock Label	1
27	030-0706-10	Upper Wrap Weldment	1
28		Cabinet (Refer to "Right Hand Cabinet Assembly" Elsewhere)	Ref
29		Cabinet (Refer to "Left Hand Cabinet Assembly" Elsewhere)	Ref

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Upper Wrap Assembly (Mechanical Scale)

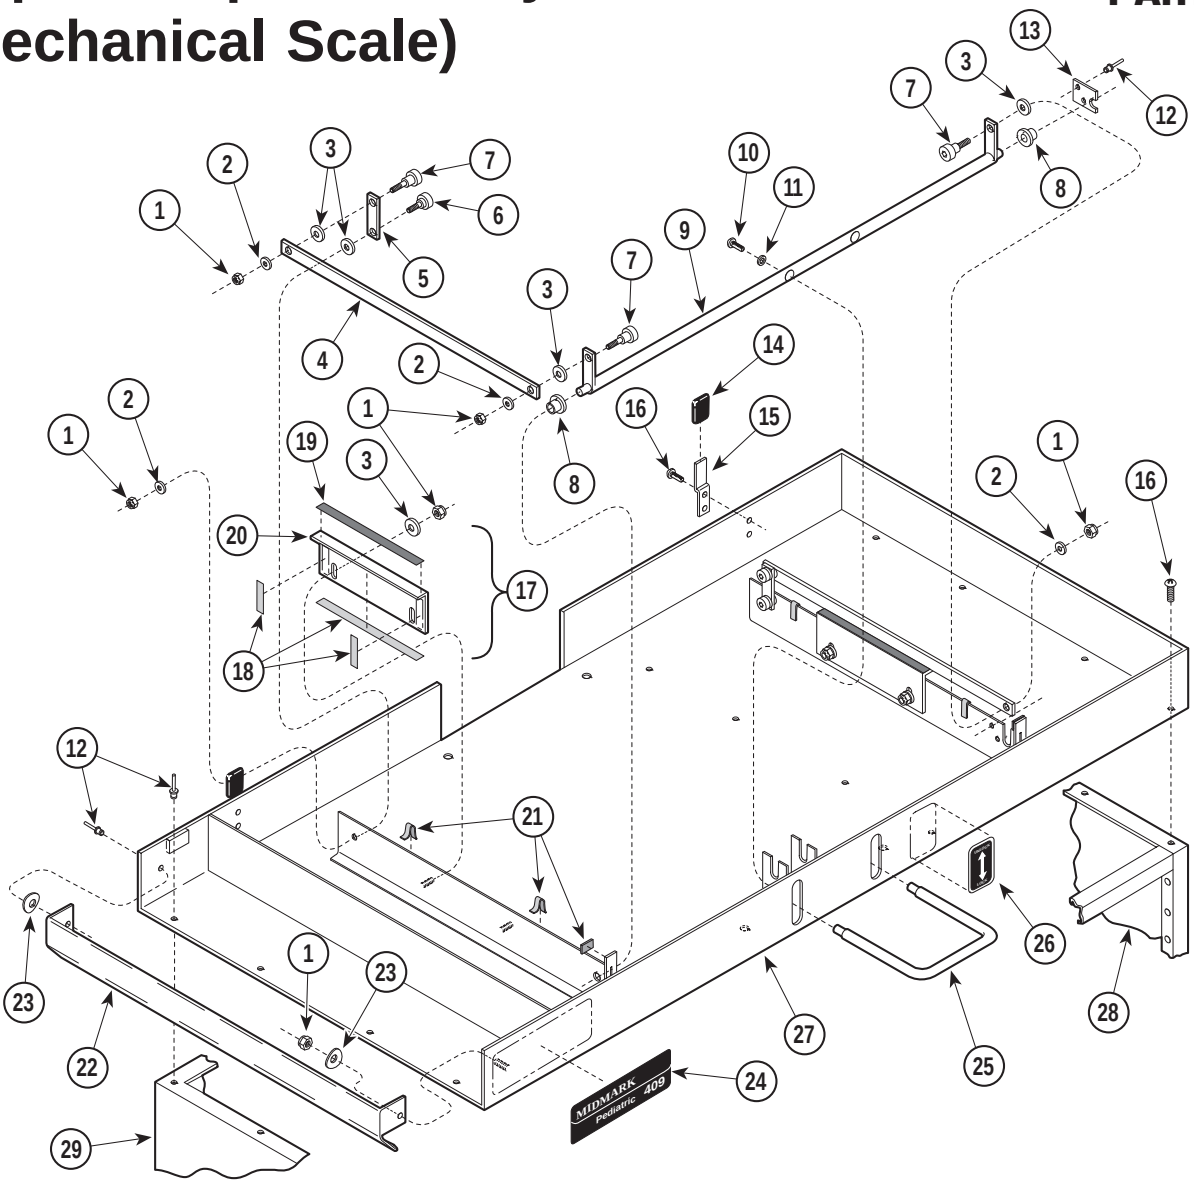

MA297100

Used on units with Serial Number CW-1329 thru CW-1631

Item	Part No.	Description	Qty.
1	041-0010-02	Nut	11
2	053-0382-00	Plastic Washer	6
3	053-0382-01	Plastic Washer	10
4	051-0630-00	Tie Bar	2
5	051-0627-00	Lever Bar	2
6	040-0010-85	Shoulder Screw	2
7	042-0014-21	Shoulder Screw	4
8	053-0114-00	Nylon Bearing	2
9	030-0707-00	Pivot Rod Weldment	1
10	040-0010-50	Screw	2
11	045-0001-35	Washer	2
12	042-0010-04	Pop Rivet	8
13	050-1768-00	Retaining Clip	1
14	053-0386-00	Vinyl Sleeve	2
15	050-1761-10	Stop Bracket	2
16	040-0010-18	Screw	12
17	029-1269-00	Bracket Assembly (Includes Items 18 thru 20)	2
18	• 053-0018-00	• Nylon Tape (Sold by the Inch)	14
19	• S071-00010	• Neophrene (Sold by the Foot)	1
20	• 050-1759-00	• Lock Bracket	1
21	S071-00010	Neophrene (Sold by the Foot)	1
22	050-1760-10	Paper Roll Door	1
23	045-0001-12	Curved Washer	2
24	053-0297-00	409 Nameplate	1
25	051-0631-00	Lock Handle	1
26	061-0274-00	Lock/Unlock Label	1
27	030-0815-10	Upper Wrap Weldment	1
28		Cabinet (Refer to "Right Hand Cabinet Assembly" Elsewhere)	Ref
29		Cabinet (Refer to "Left Hand Cabinet Assembly" Elsewhere)	Ref

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

Upper Wrap Assembly (Mechanical Scale)

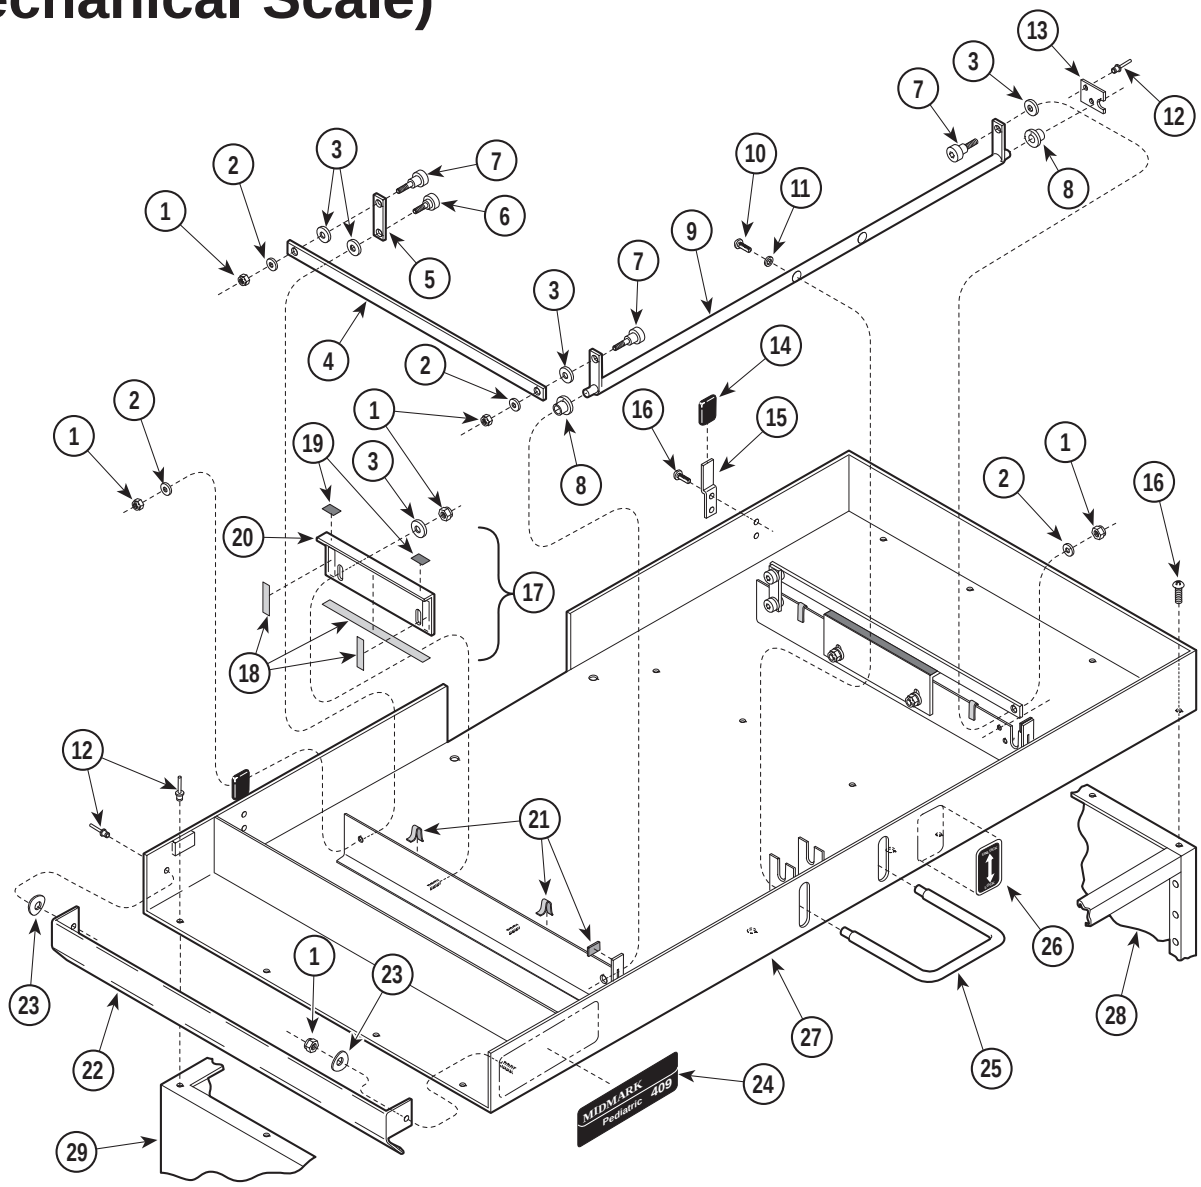

MA297100

Used on units with Serial Number CW-1632 thru Present

Item	Part No.	Description	Qty.
1	041-0010-02	Nut	11
2	053-0382-00	Plastic Washer	6
3	053-0382-01	Plastic Washer	10
4	051-0630-00	Tie Bar	2
5	051-0627-00	Lever Bar	2
6	040-0010-85	Shoulder Screw	2
7	042-0014-21	Shoulder Screw	4
8	053-0114-00	Nylon Bearing	2
9	030-0707-00	Pivot Rod Weldment	1
10	040-0010-50	Screw	2
11	045-0001-35	Washer	2
12	042-0010-04	Pop Rivet	8
13	050-1768-00	Retaining Clip	1
14	053-0386-00	Vinyl Sleeve	2
15	050-1761-10	Stop Bracket	2
16	040-0010-18	Screw	12
17	029-1269-00	Bracket Assembly (Includes Items 18 thru 20)	2
18	• 053-0018-00	• Nylon Tape (Sold by the Inch)	14
19	• 053-0716-00	• Neophrene Bumper	2
20	• 050-1759-00	• Lock Bracket	1
21	S071-00010	Neophrene (Sold by the Foot)	1
22	050-1760-10	Paper Roll Door	1
23	045-0001-12	Curved Washer	2
24	053-0297-00	409 Nameplate	1
25	051-0631-00	Lock Handle	1
26	061-0274-00	Lock/Unlock Label	1
27	030-0908-10	Upper Wrap Weldment	1
28		Cabinet (Refer to "Right Hand Cabinet Assembly" Elsewhere)	Ref
29		Cabinet (Refer to "Left Hand Cabinet Assembly" Elsewhere)	Ref

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494 Rev. 12/97

Printed in U.S.A.

Table Top Assembly (No Scale)

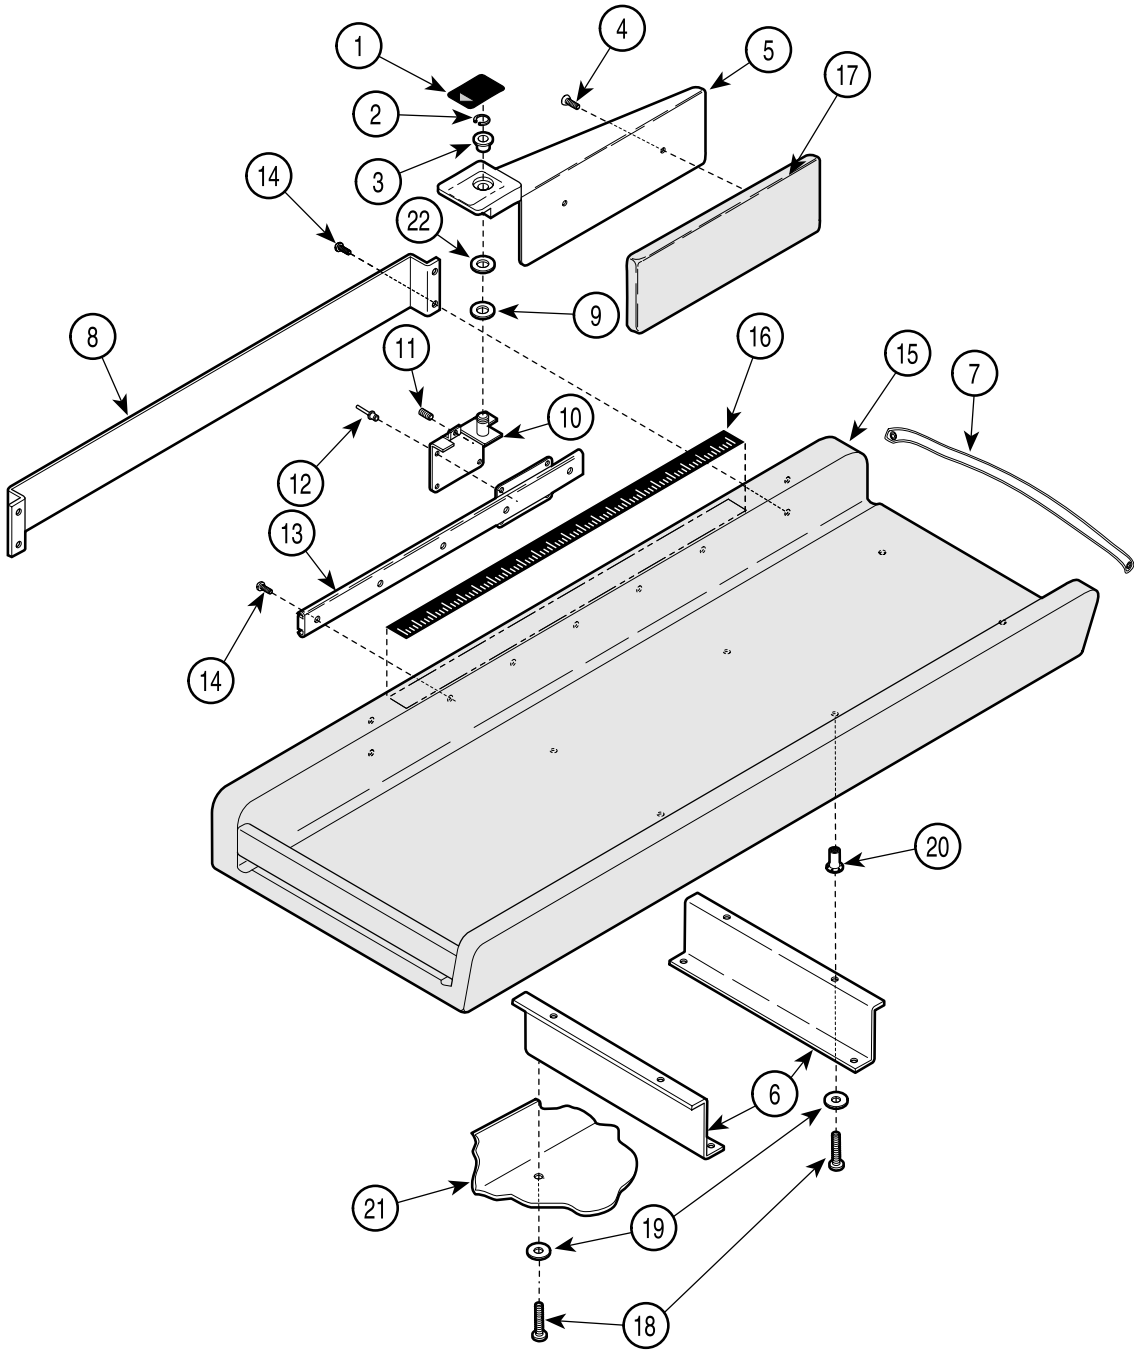

MA404401

Item	Part No.	Description	Qty
1	061-0275-00	Indicator Label	1
2	042-0077-00	Retaining Ring	1
3	053-0114-03	Flanged Bearings	1
4	040-0010-56	Screw	2
5	030-1056-10	Measuring Arm Weldment	1
6	050-3944-40	Support Bracket Weldment	2
7	029-0017-10	Paper Tear Strip	1
8	050-3930-10	Slide Cover	1
9	053-0383-00	Pivot Washer	1
10	030-0715-10	Pivot Bracket Weldment	1
11	040-0010-63	Screw	1
12	042-0010-04	Pop Rivet	4
13	016-0398-00	Linear Motion Slide	1
14	040-0008-46	Screw	9
15	002-0631-00	Upholstered Table top (Includes Item 16 [Specify Color])	1
16	• 061-0273-00	• Scale Label	1
17	028-0263-XX	Panel Assembly(Specify Colors)	1
18	040-0250-121	Screw	8
19	045-0001-02	Washer	8
20	042-0045+03	Nutsert	4
21		Upper Wrap (Refer to “Upper Wrap Assembly” Elsewhere”	Ref.
22	045-0001-109	Pivot Washer	1

Always Specify Model & Serial Number

© Midmark Corporation 1997 SF-1561 Rev. 1/00

Printed in U.S.A.

Table Top Assembly (Mechanical Scale)

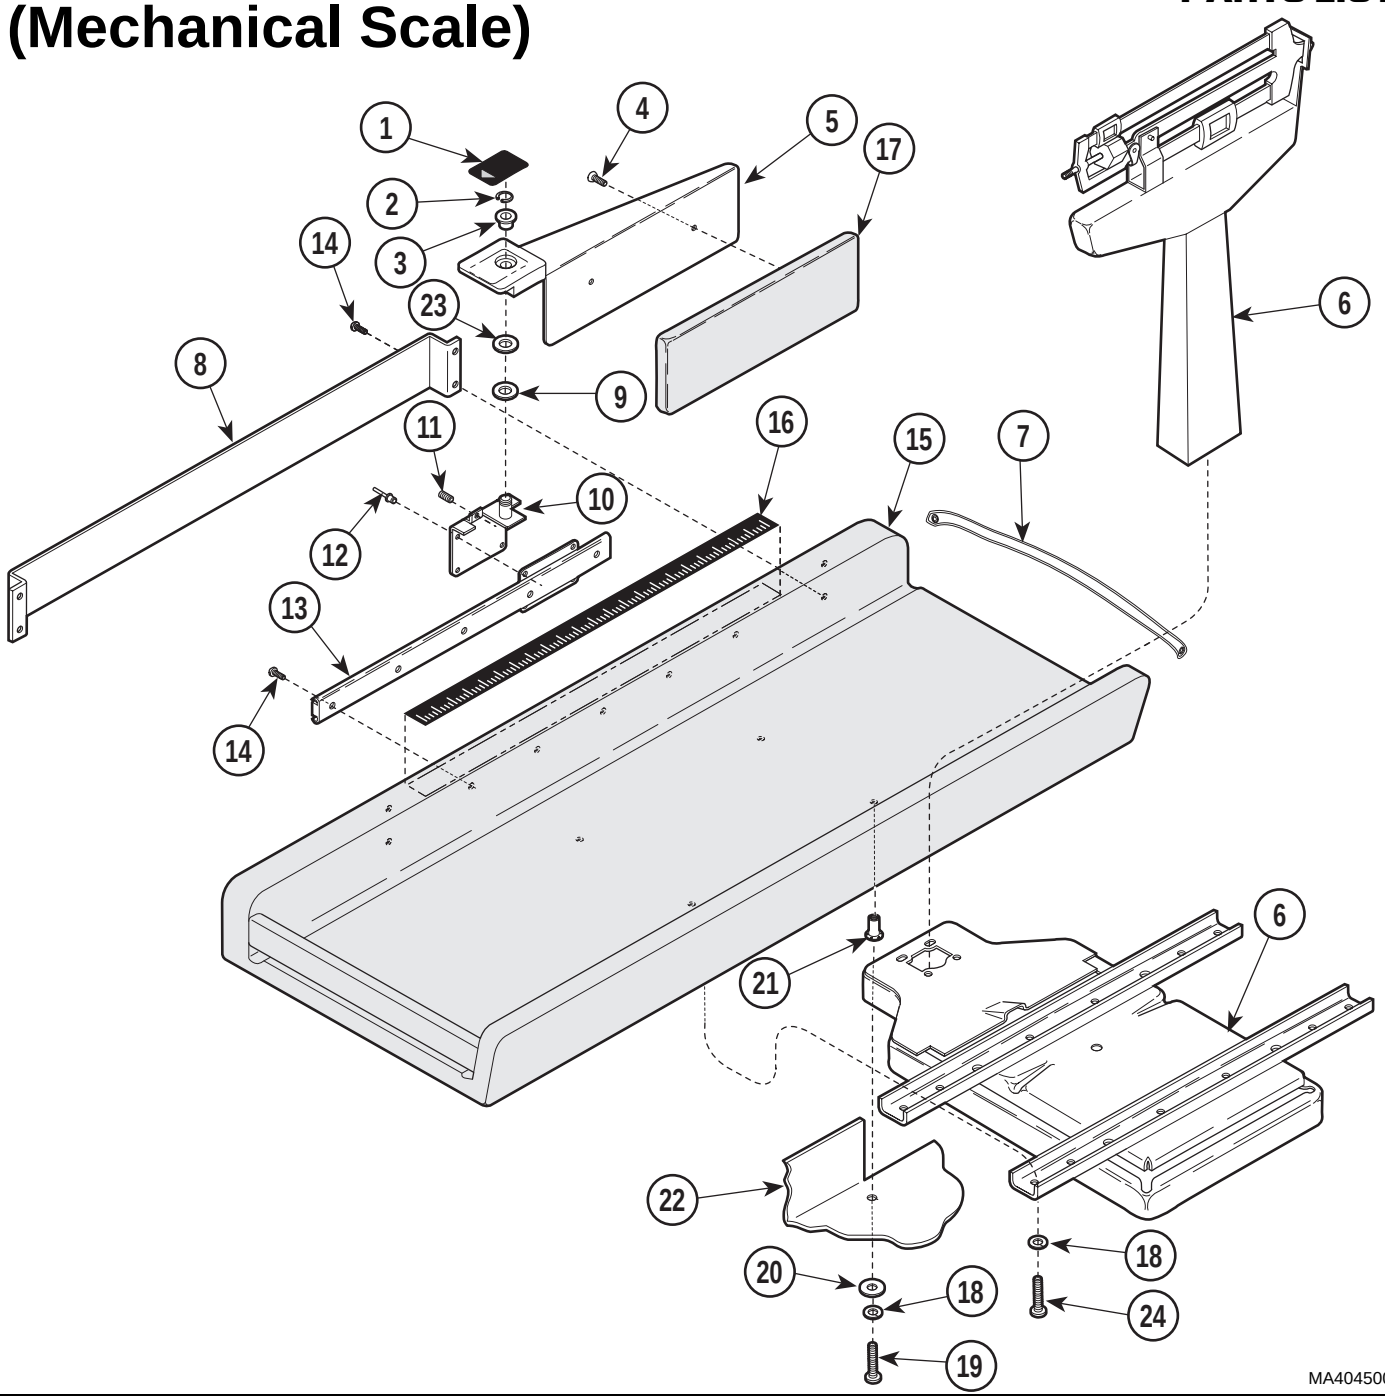

MA404500

Item	Part No.	Description	Qty
1	061-0275-00	Indicator Label	1
2	042-0077-00	Retaining Ring	1
3	053-0114-03	Flanged Bearings	1
4	040-0010-56	Screw	2
5	030-1056-10	Measuring Arm Weldment	1
6	016-0466-00	Mechanical Scale - (For Individual parts ordering, contact Health o Meter Technical Service @ 800-638-3722)	1
7	029-0017-10	Paper Tear Strip	1
8	050-3930-10	Slide Cover	1
9	053-0383-00	Pivot Washer	1
10	030-0715-00	Pivot Bracket Weldment	1
11	040-0010-63	Screw	1
12	042-0010-04	Pop Rivet	4
13	016-0398-00	Linear Motion Slide	1
14	040-0008-46	Screw	9
15	002-0631-00	Upholstered Table top (Includes Item 16 [Specify Color])	1
16	• 061-0273-00	• Scale Label	1
17	028-0263-XX	Panel Assembly (Specify Colors)	1
18	045-0001-03	Lockwasher	8
19	040-0250-84	Screw	4
20	045-0001-02	Washer	4
21	042-0045-03	Nutsert	4
22		Upper Wrap (Refer to “Upper Wrap Assembly” Elsewhere”	Ref.
23	045-0001-109	Pivot Washer	1
24	040-0250-114	Screw	4

Always Specify Model & Serial Number

© Midmark Corporation 1997 SF-1561 Rev. 1/00

Printed in U.S.A.

Table Top Assembly (Mechanical Scale)

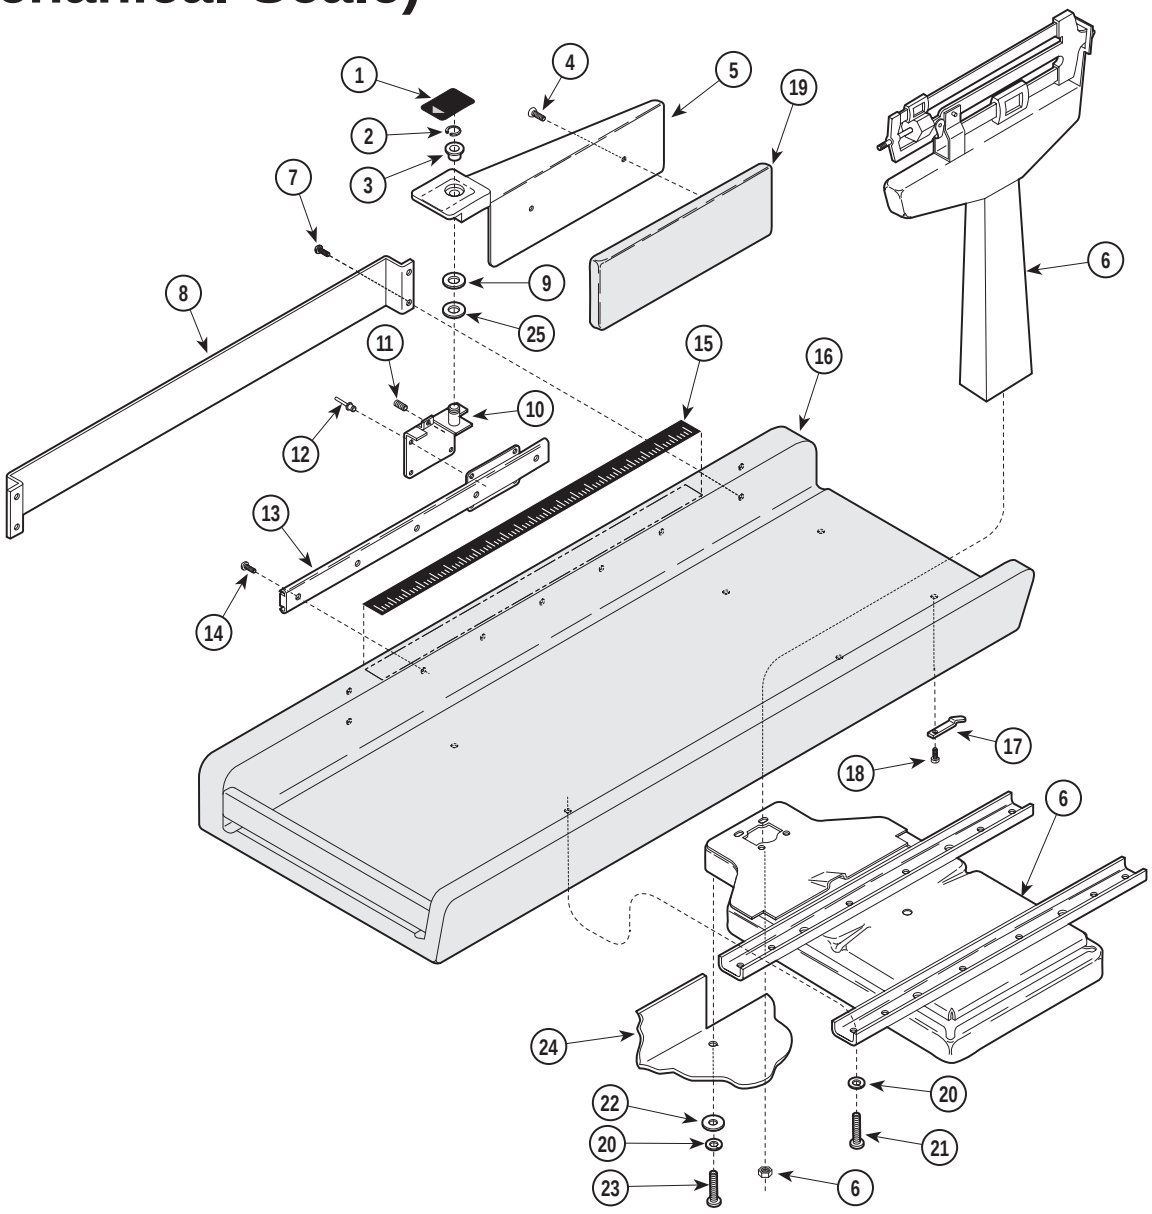

MA297400

Used on units with Serial Number CW-1329 thru CW-2264

Item	Part No.	Description	Qty.
1	061-0275-00	Indicator Label	1
2	042-0077-00	Retaining Ring	1
3	016-0392-01	Flanged Bearing	1
4	040-0010-56	Screw	2
5	030-0988-00	Measuring Arm Weldment	1
6	016-0466-00	Mechanical Scale - Complete (For individual parts ordering, contact Health o meter Technical Service @ 800-638-3722)	1
7	040-0010-48	Screw	4
8	050-1763-00	Slide Cover	1
9	053-0383-00	Pivot Washer	1
10	030-0715-00	Pivot Bracket Weldment	1
11	040-0010-63	Set Screw	1
12	042-0010-02	Pop Rivet	4
13	016-0398-00	Linear Motion Slide	1
14	040-0008-46	Screw	5
15	061-0273-00	Scale Label	1
16	002-0527-XX	Upholstered Table Top (Includes Items 15 and 17 thru 19 [Specify Color])	1
17	• 053-0001-03	• Bag Clip	2
18	• 040-0006-00	• Screw	2
19	• 028-0263-XX	• Panel Assembly (Specify Color)	1
20	045-0001-03	Lockwasher	8
21	040-0250-114	Screw	4
22	045-0001-02	Washer	1
23	040-0250-84	Screw	4
24		Upper Wrap (Refer to "Upper Wrap Assembly" Elsewhere)	Ref

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494 Rev. 2/98

Printed in U.S.A.

Table Top Assembly (Mechanical Scale)

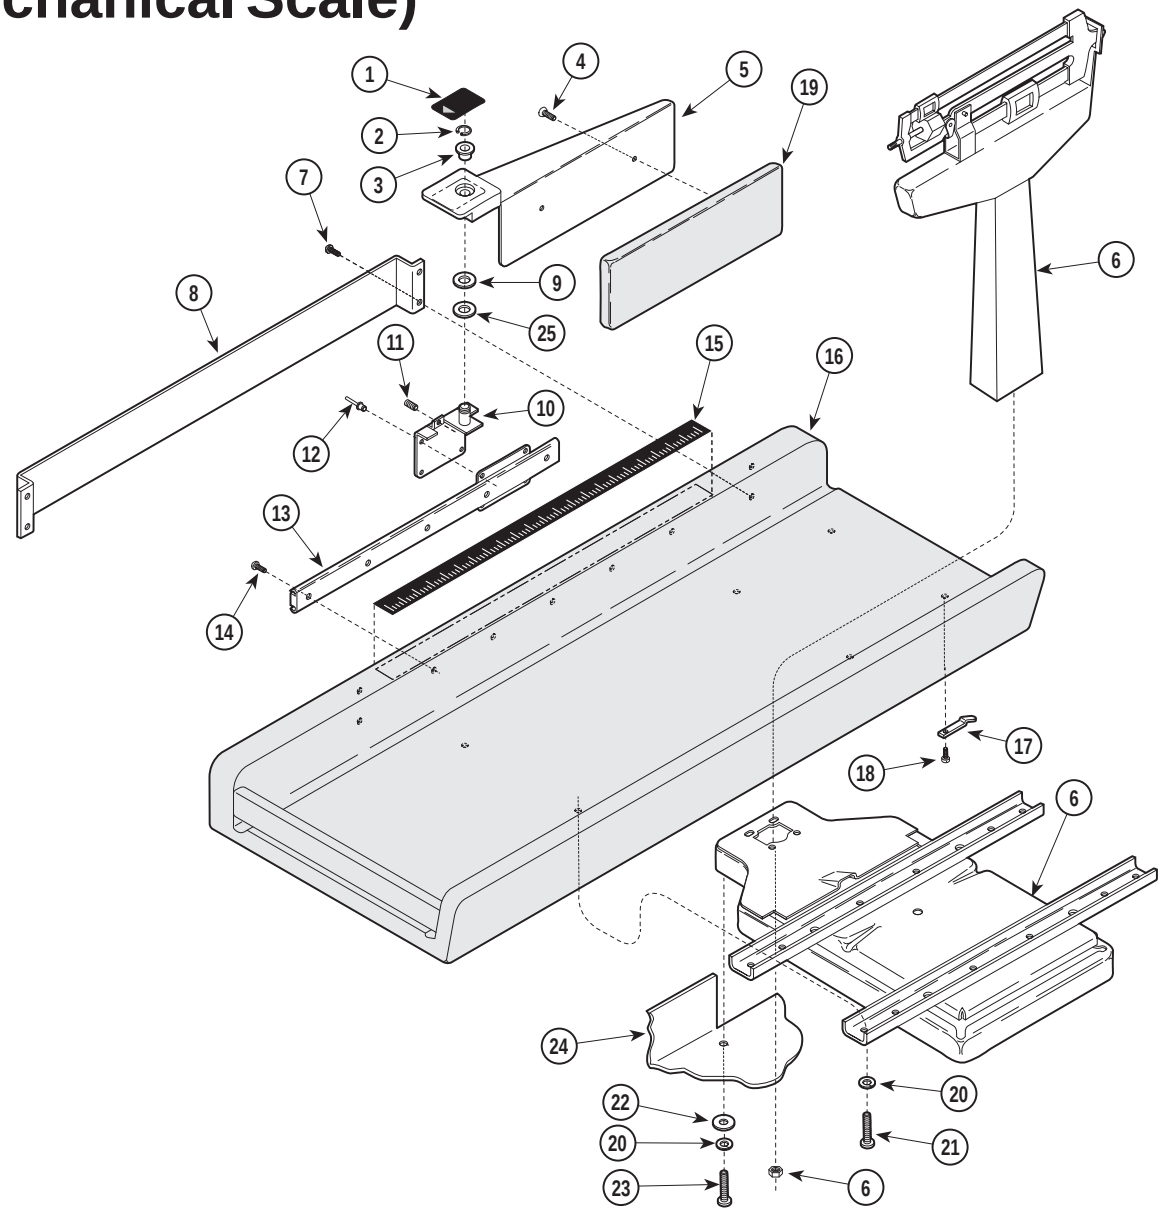

MA297400

Used on units with Serial Number CW-2265 thru Present

Item	Part No.	Description	Qty.
1	061-0275-00	Indicator Label	1
2	042-0077-00	Retaining Ring	1
3	053-0114-03	Nylon Bearing	1
4	040-0010-56	Screw	2
5	030-1056-00	Measuring Arm Weldment	1
6	016-0466-00	Mechanical Scale - Complete (For individual parts ordering, contact Health o meter Technical Service @ 800-638-3722)	1
7	040-0010-48	Screw	4
8	050-1763-00	Slide Cover	1
9	053-0383-00	Pivot Washer	1
10	030-0715-00	Pivot Bracket Weldment	1
11	040-0010-63	Set Screw	1
12	042-0010-02	Pop Rivet	4
13	016-0398-00	Linear Motion Slide	1
14	040-0008-46	Screw	5
15	061-0273-00	Scale Label	1
16	002-0527-XX	Upholstered Table Top (Includes Items 15 and 17 thru 19 [Specify Color])	1
17	• 053-0001-03	• Bag Clip	2
18	• 040-0006-00	• Screw	2
19	• 028-0263-XX	• Panel Assembly (Specify Color)	1
20	045-0001-03	Lockwasher	8
21	040-0250-114	Screw	4
22	045-0001-02	Washer	1
23	040-0250-84	Screw	4
24		Upper Wrap (Refer to "Upper Wrap Assembly" Elsewhere)	Ref
25	045-0001-109	Washer	1

Always Specify Model & Serial Number

© Midmark Corporation 1995 SF-1494 Rev. 2/98

Printed in U.S.A.

SECTION VI
PARTS LIST

© Midmark Corporation 1995 SF-1494

Printed in U.S.A.

COMMENTS

The Technical Publications Department of Midmark Corporation takes pride in its publications. We are sure that our manuals will fill all of your needs when you are performing scheduled maintenance, servicing, or repairs on a Midmark product.

However, if you find any errors or feel that there should be a change, addition, or deletion to a manual, please let us know!

Page(s) and Paragraph(s) Needing Changed:

Description of Error or Desired Change:

Please fax or mail a copy of this completed comment sheet to:

Midmark Corporation
ATTN: Technical Publications Department
60 Vista Drive
Versailles, Ohio 45380
Fax: (937) 526-5542

© Midmark Corporation 2000 SF-1621

Printed in U.S.A.

Return To Table Of Contents

FAX ORDERING FORM

(SERVICE PARTS ONLY)

NOTES:

- **ALL BLOCKED AREAS MUST BE COMPLETED.**
- **USE FOR NON-WARRANTY FAX ORDERS ONLY. WARRANTY ORDERS MUST BE TELEPHONED IN (1-800-MIDMARK).**

ATTENTION: SERVICE DEPARTMENT FAX#: 877-249-1793

ACCT #: _____ **P.O. #:** _____ **DATE:** _____

NAME: _____ **SHIP TO:** _____

ADDRESS: _____

CITY, ST.: _____

CONTACT: _____

PHONE: _____

☐ **NON-EMERGENCY ORDER - TO SHIP WITHIN 72 HOURS IF PART(S) IN STOCK.**

☐ **EMERGENCY ORDER - TO SHIP WITHIN 24 HOURS IF PART(S) IN STOCK (IF ORDER IS RECEIVED BEFORE 1:30 P.M. E.S.T).**

SEND NOTIFICATION IF PARTS ARE NOT AVAILABLE TO SHIP WITHIN 24 HOURS VIA E-MAIL OR FAX TO: _____

METHOD OF SHIPMENT **OTHER** _____

UPS	FED EX
☐ NEXT DAY A.M.	☐ NEXT DAY A.M.
☐ NEXT DAY P.M.	☐ NEXT DAY P.M.
☐ 2ND DAY	☐ 2ND DAY
☐ GROUND	☐ ECONOMY

QTY.	PART #	DESCRIPTION (SPECIFY COLOR OF ITEM IF APPLICABLE)	COLOR CODE	PRICE/PER

Return To Table Of Contents

Return To Table Of Contents

Midmark Corporation
60 Vista Drive
P.O. Box 286
Versailles, Ohio 45380-0286
937-526-3662
Fax 937-526-5542
midmark.com

Because we care.

Subject To Change Without Notice

© Midmark Corporation - 2003

Printed in U.S.A.